

SHELVES LCD DISPLAY

LCD
Series

The SHELVES LCD DISPLAY by NSELED is the easiest way to enhance the shopping experience and to upgrade indoor communication, attracting attention where is needed.

Flexible and innovative

Our shelves LCD displays are designed to support flexible content strategies: from names and prices to advertising and promos.

Linear and sleek, our displays can be combined vertically or horizontally.

You can choose among an **assortment of sizes** to best suit your needs and enrich the customer experience in your business.


Network CMS

We also offer cloud basis **network CMS** if required.

It is also possible to run a third party Digital Signage software via the Android PC board.

Smart design

Designed with a **minimal frame**: your communication is free from limits! The sleek look is achieved with a striking **aluminum structure** and **IPX1 edge-to-edge glass**.

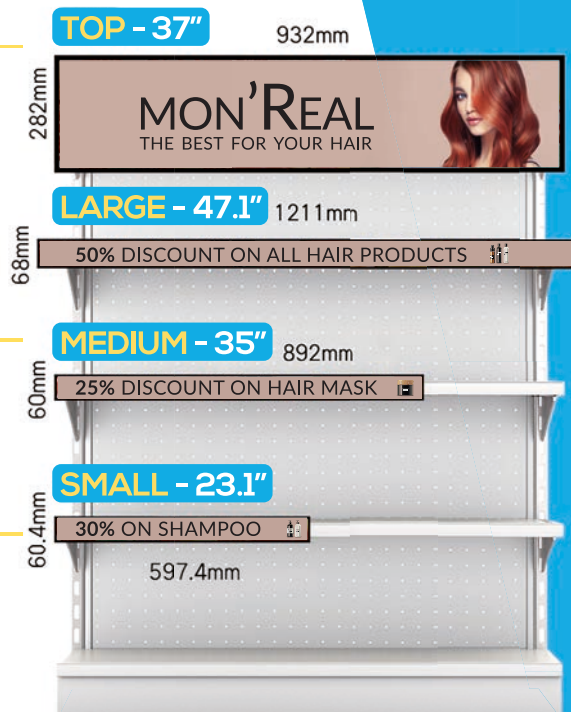

Shelves LCD displays can offer valuable information and extend the sensory experience in the store.



BODY LINE - SPECIAL OFFER - 50% OFF - JUST FOR TODAY

HAIR MASKS - BUY ONE GET ONE FREE

		Small	Medium	Top	Large
Panel	Display Size	1920x158 (12:1)	2880x158 (18:1)	1920x540 (16:4.5)	3840x160 (24:1)
	Resolution	1920x158 (12:1)	2880x158 (18:1)	1920x540 (16:4.5)	3840x160 (24:1)
	Active Display Area (mm)	585.6(H)x48.19(V)	878.4(H)x48.19(V)	899.7(H)x253.04(V)	1196.16(H)x49.84(V)
	Aspect Ratio	12:01	18:01	16:4.5	24:01
	Brightness (cd/m2)	350 nit-500 nits	350 nit-500 nits	350 nit-700 nits	350 nit-700 nits
	Contrast Ratio (Type)	1000:1	1000:1	1000:1	1000:1
	Viewing Angle (H/V)	178/178	178/178	178/178	178/178
	Color	16.7M	16.7M	16.7M	16.7M
	Pixel Pitch (mm)	0.283(H)x0.283(V)	0.283(H)x0.283(V)	0.330(H)x0.330(V)	0.330(H)x0.330(V)
Sound	Response time (G-to-G)	6.5ms	6.5ms	6.5ms	6.5ms
	Operation Hour	24/7	24/7	24/7	24/7
Power	Audio Output	5W,80 (2sets) Dual-channel stereo audio output			
	Type	Internal	Internal	Internal	Internal
	Power Supply	AC 100-240 V-(+/- 10) - 50/60Hz			
	Power Consumption	20	20	25	30
Mechanical Spec	Max (W/h)	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W
	Sleep mode Off mode	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W
Environmental	Protection Glass	N/A	N/A	N/A	N/A
	Stand Type	Wall mount	Wall mount	Wall mount	Wall mount
	Operating Temperature	0°C - 45°C			
	Storage Temperature	-10°C - 55°C			
OS	Operating Humidity	10% - 80%			
	Storage Humidity	5% - 95%			
	Processor	PX30 (1.8GHz, octa corer)			
	RAM	1G DDR3			
	Memory	Built-in FLASH memory 8G			
	USB	USB2.0 HOST (x2)			
	LAN	10M/100M Ethernet (Network version screen only)			
	External memory	8GB SD card (up to 320)			
	Multimedia	Video (MPG, AVI, MP4, RM, RMVB, TS) - Image (JPG, GIF, BMP, PNG)			
	Media Resolution	1920*540			
Certification	Wi-Fi	802.11b/g/n Ethernet (Network version screenonly)			
	Operating System	Android 8.0/9.0			
Accessories	Safety	CE - RoHS			
	Included	Scheduling software, Remote control, Key, Power cable 5D card			
	Quality assurance	1 year			
Type of packaging		Carton box/honeycomb box+ wooden case			



Plug and Play



24/7 Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight




Eco Power Timer



Commercial Grade
Strong durability
for 24/7 activity



High Brightness
High brightness
Low power consumption



Horizontal or Vertical
Landscape and portrait:
rotate and switch freely



Multiple Length and Width

A wide range of sizes to adapt to different shelves and racks.
Customization on request (subject to evaluation).

