




# TOTEM Outdoor LED display

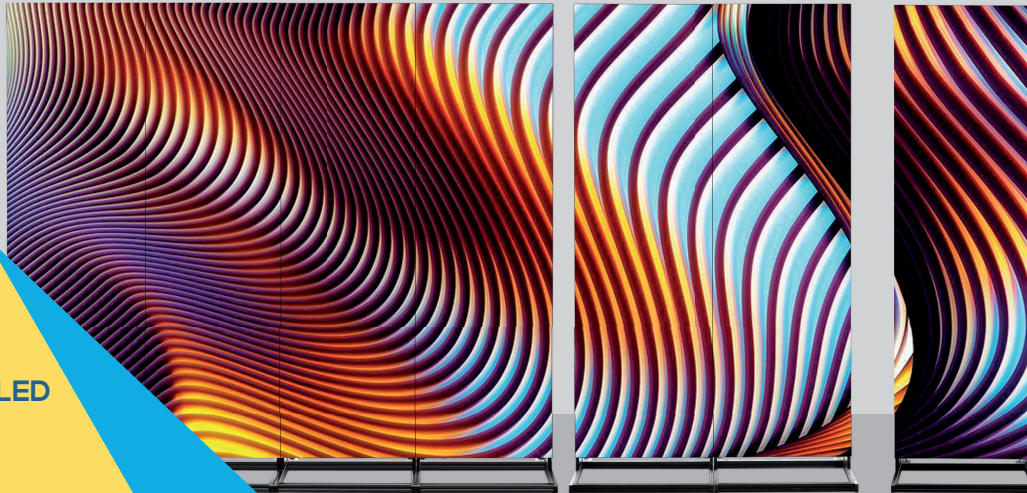

Outdoor digital LED  
poster  
LED banner

SHOPPING MALLS



HOTELS



BANK



BARS



STORES



HOSPITAL



RESTAURANTS



SCHOOL



EXHIBITIONS



EVENTS




The whole screen has obtained CE and ROHS certificates and passed the FCC test.

Totem LED display is designed to meet the standard of Europe and the USA.

After you send the program, the LED poster can automatically play video, pictures, text, and other programs once you connect the plug.



# SMART CONTROL

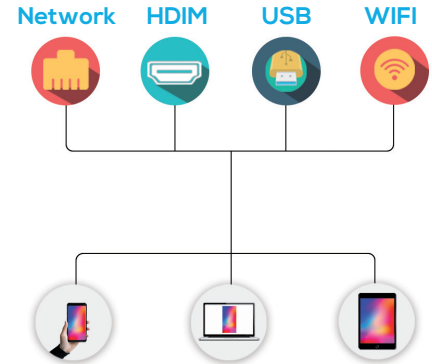


- Synchronous And Asynchronous Dual-mode Media
- Real-time Zoom In And Out
- 8 GB Memory
- Supports USB Expansion


# ▶ MULTIPLE INSTALLATION METHOD

It's easy to adjust the screen size by using different quantity of Portable led posters.


Standing  
▽

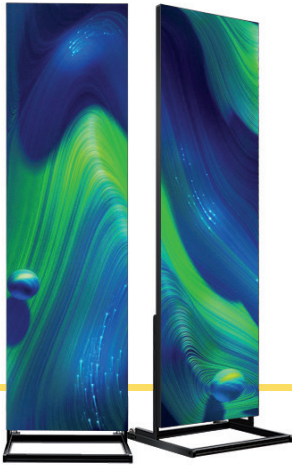

Hanging  
▽

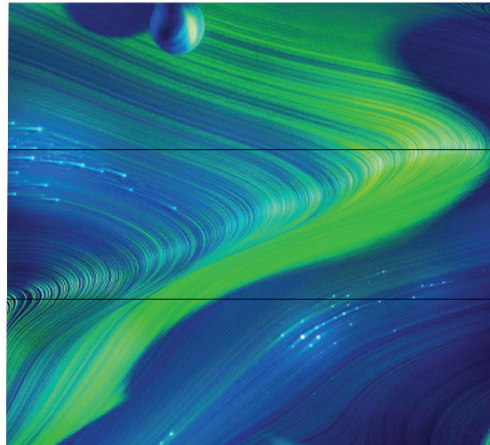


Creative Stitching  
▽

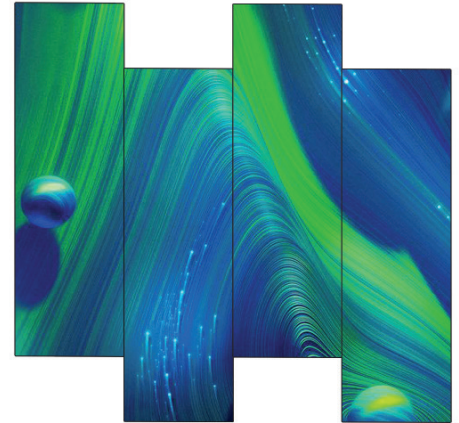


# LIGHT WEIGHT & ULTRA - THIN

- LIGHTWEIGHT
- THIN FRAME
- EASY TO MOVE



38 KG

## ▶ EXTERNAL DEVICE COMPATIBLE

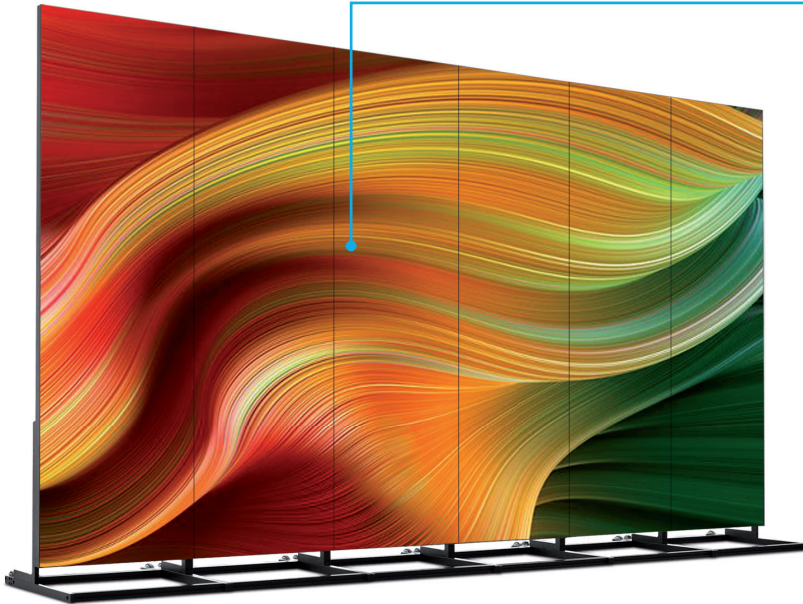

Connect the external light sensor to automatically adjust the screen brightness according to the environment

▼  
**Energy Saving**

Connect with the speaker

▼  
**Make Your Ads Impressive And Unforgettable**

Support interactive function(customizable)


▼  
**Better Advertising Effect**

# SERVICE



We have a stable supply chain system. Which not only guarantees the product quality but is also more competitive in terms of lead time.

We will do our best to meet your project requirements.

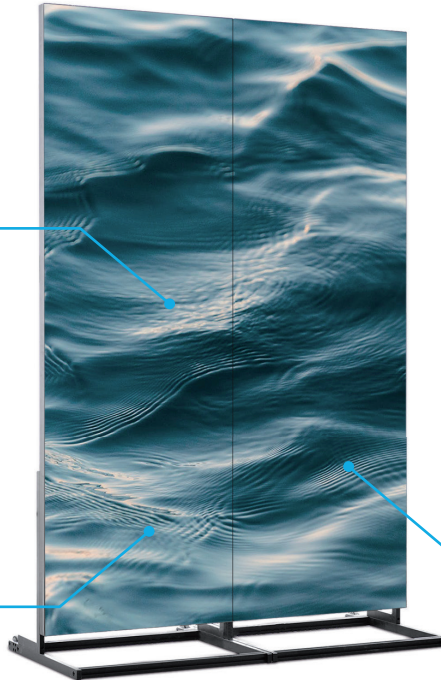

Hot-selling items are always in stock



Customers don't have to wait for more than 10 days of production time.

We have freight forwarders that have cooperated for many years



Give the most cost-effective freight plan faster.



- CUSTOM SIZE
- OPERATING SYSTEM



# SPECIFICATION

| Model Type                 | P2.5 - 640x1920 mm              | P3 - 576x1920 mm                | P3 - 768x1920 mm                |
|----------------------------|---------------------------------|---------------------------------|---------------------------------|
| Application                | Outdoor                         | Outdoor                         | Outdoor                         |
| Pixel pitch                | 2.5mm                           | 3mm                             | 3 mm                            |
| Density                    | 160000                          | 111111                          | 111111                          |
| LED Type                   | SMD1415                         | SMD1921                         | SMD1921                         |
| Pixel type(R / G / B)      | 1R1G1B (3 in 1)                 | 1R1G1B (3 in 1)                 | 1R1G1B (3 in 1)                 |
| Module size                | 160 x 160mm                     | 192 x 192 mm                    | 192 x 192 mm                    |
| Module Resolution          | 64 x 64 pixel                   | 64 x 64 pixel                   | 64 x 64 pixel                   |
| LED Module layout(W×H)     | 4 x 12mm                        | 3 x 10                          | 4 x 10                          |
| Display Size               | 640*1920mm                      | 576 x 1920mm                    | 768 x 1920 mm                   |
| Display Resolution         | 256*768pixel                    | 192 x 640pixel                  | 256 x 640pixel                  |
| Display area               | 1.23m <sup>2</sup>              | 1.11m <sup>2</sup>              | 1.48m <sup>2</sup>              |
| Cabinet Size(mm)           | 643 x 1930mm                    | 579 x 1930 mm                   | 781 x 1930 mm                   |
| Resolution(W×H)            | 256 x 768                       | 192x640                         | 256 x 640                       |
| Case Material              | Aluminum                        | Aluminum                        | Aluminum                        |
| Weight                     | 45kg/unit                       | 50kg /unit                      | 55kg /unit                      |
| Drive mode                 | 1/32scan                        | 1/16scan                        | 1/16scan                        |
| Viewing Distance           | >2m                             | >3m                             | >3m                             |
| Brightness                 | 5000 cd/m <sup>2</sup>          | 5000 cd/ m <sup>2</sup>         | 5000 cd/ m <sup>2</sup>         |
| Viewing Angle              | 140°/140°                       | 140°/140°                       | 140°/140°                       |
| Refresh rate               | ≥1920Hz                         | ≥1920Hz                         | ≥1920Hz                         |
| Input voltage              | AC 240/100±10%                  | AC 240/100±10%                  | AC 240/100±10%                  |
| Maximum Power Consumption  | 1350W                           | 1050W                           | 1400W                           |
| Average Power Consumption  | 450W                            | 315W                            | 420W                            |
| Control method:            | Asynchronous(WIFI/USB/LAN/HDMI) | Asynchronous(WIFI/USB/LAN/HDMI) | Asynchronous(WIFI/USB/LAN/HDMI) |
| Temperature Operating (°C) | -10°~+40°                       | -10°~+40°                       | -10°~+40°                       |
| Working Humidity           | 10%-90%                         | 10%-90%                         | 10%-90%                         |
| IP Rating                  | IP65                            | IP65                            | IP65                            |
| Certificate                | CE/ROHS/FCC                     | CE/ROHS/FCC                     | CE/ROHS/FCC                     |

NSELED Europe srl  
 Via Marco d'Agiate, 41/B  
 20139 Milano Italia  
 info@nseled.eu  
 T. 02 40707210



For more information  
[www.nseled.eu](http://www.nseled.eu)

