



Indoor LEDwall





Indoor video walls can create a spectacular impact to passers-by and reinforce any brand communication. NSELED LED system delivers excellent picture quality even at close range and at a wide viewing angle.


FAST&EASY TO UPDATE


NSELED LEDwalls are user-friendly. Thanks to an A4 controller, they support LAN, WIFI, USB and HDMI connection. A CLOUD allows you to upload content and update displays remotely.

With an Indoor LED screen you have the possibility to display high-resolution images and videos in public spaces such as exhibitions, museums, retail stores, theatres, education facilities and security monitoring rooms.





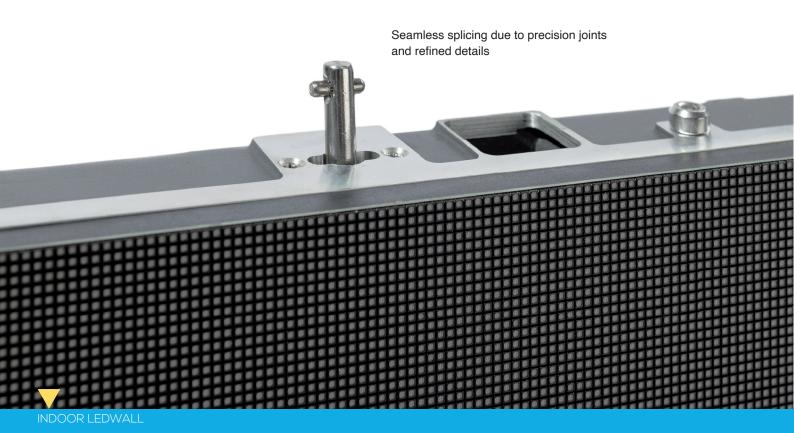




- Energy saving
- Long life span
- High image definition
- High-quality LED lamp beads



INDOOR LEDWALL SPECIFICATIONS

Indoor wall mounted WA series					
Model Type	P2	P2.5	P3.076	P4	
Application	Indoor	Indoor	Indoor	Indoor	
Module size	320*160mm	320*160mm	320*160mm	320*160mm	
Brightness	1000 nit	1000 nit	800 nit	800 nit	
Scan	1/40	1/32	1/26	1/20	
Remarks	3840HZ (High Refresh Rate)	3840HZ (High Refresh Rate)	3840HZ (High Refresh Rate	3840HZ (High Refresh Rate)	
	with Magnet	with Magnet	with Magnet	with Magnet	

WA Series				
640x480 mm	640x640 mm	320x640 mm	960x480 mm	

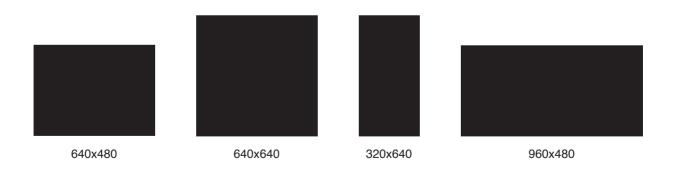

INDOOR LEDWALL SPECIFICATIONS

Indoor wall mounted WS series				
Model Type	P1.953	P2.604	P2.976	P3.910
Application	Indoor	Indoor	Indoor	Indoor
Module size	250*250mm	250*250mm	250*250mm	250*250mm
Brightness	1000 nit	1000 nit	1000 nit	800 nit
Scan	1/32	1/32	1/28	1/16
Remarks	3840HZ (High Refresh Rate)	3840HZ (High Refresh Rate)	3840HZ (High Refresh Rate	3840HZ (Hight Refresh Rate)
	with Magnet	with Magnet	with Magnet	with Magnet

WS Series				
500x500 mm	1000x250 mm	1000x500 mm		





NSELED Europe srl Via Marco d'Agrate, 41/B 20139 Milano Italia info@nseled.eu T. 02 40707210











