




Click here to
**REQUEST
INFORMATION**



SLIM TAXI LED display

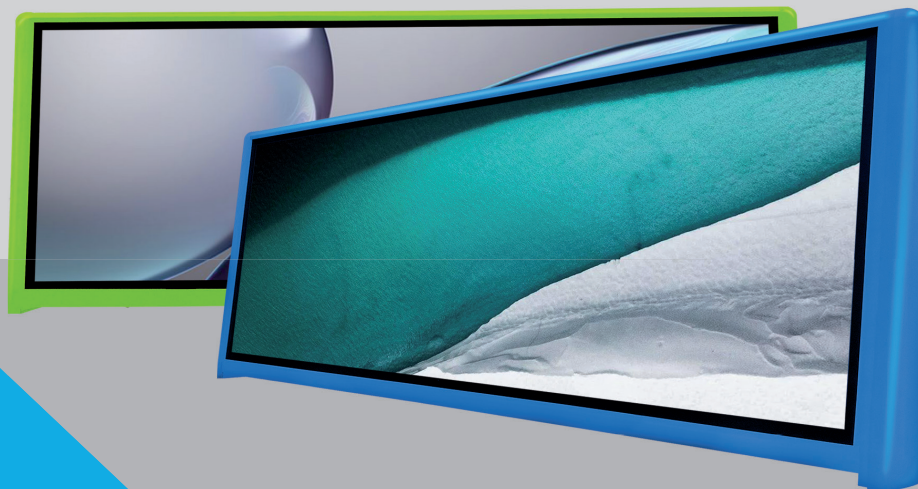


Car Top LED Display
LED Motion
ULTRA THIN VERSION

Slim Type Design, Super High Brightness, Ultra High Definition, HD performance

Different Pixel Pitch Available

2.5 mm	5500 nits
3.33mm	5000 nits
5mm	5000 nits



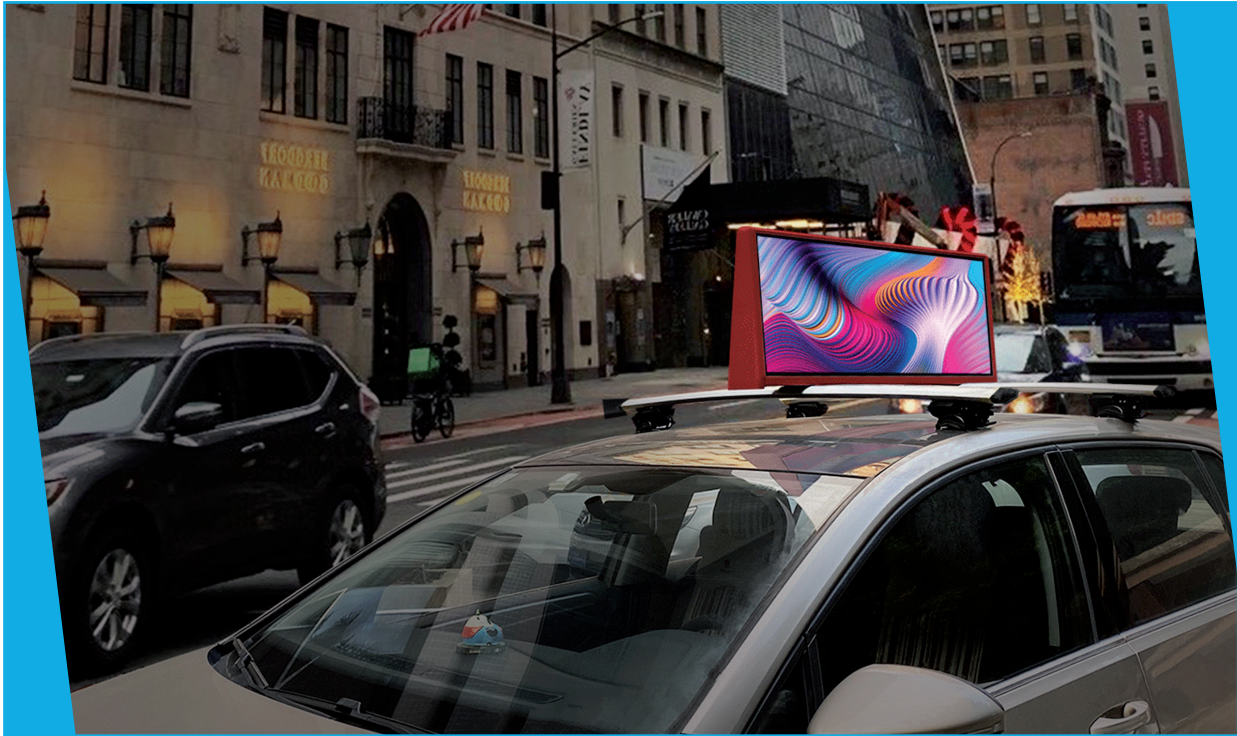

► RELIABLE LED MOTION DEVICE

High Quality And Stable LED Components
The High Refresh Rate Driving IC

► Lower Power Consumption

High-Quality Materials And Parts

► The LED display is firmly attached to the car

Vehicle Dedicated Power Supply

► Ensure the highest performance of LED Panel and keep the whole system running.



QUALITY CONTROL TEST ◀



For Europe •

✓ **RoHS2**

CE

**96
hours**

AT 70°C and 80% humidity

testing of vehicle electronics compatibility



• For USA

FC

**72
hours**

aging testing

100% vibration testing



SLIM TAXI LED display

▶ MULTIPLE CONTROL METHODS



Car Rack available to install the display on different types of cars



EASY TO INSTALL AND MAINTAIN ◀

NSE LED team will provide a complete video guide to be able to install and use the Taxi LED display at their full performance potential.



NSE provides different sizes and models of roof racks for you to choose from.



SPECIFICATION

Product name:	P2.5	P3.33	P5
Model Type:	SLIM P2.5	SLIM P3.33	SLIM P5
Pixel Pitch:	2.5 mm	3.33 mm	5mm
LED Type:	SMD2121	SMD 1921	SMD 2727
Pixel Density:	160,000 dot/ m2	90,000 dot/ m2	40000 dot/ m2
Module Size:	160*160mm	320*160mm	160*160mm
Screen Size:	960mm*320mm	960mm*320mm	960mm*320mm
Screen Resolution:	384*128 dot	288*96 dot	192*64 dot
Frame Size:	1100mm(L) x 410mm(H) XW:164mm(bottom)/ 99mm (top)	1100mm(L) x 410mm(H) XW:164mm(bottom)/ 99mm (top)	1100mm(L) x 410mm(H) XW:164mm(bottom)/ 99mm (top)
Brightness:	5500 nit	5000 nit	5000 nit
Contrast:	8000:01:00	8000:01:00	8000:01:00
View Angle:	150°(H)/150°(V)	150°(H)/150°(V)	150°(H)/150°(V)
Scan Mode:	1/32 scan	1/24 scan	1/8 scan
Power Supply Input:	DC9--24V	DC9--24V	DC9--24V
Max Consumption:	430w	400w	450w
Average Consumption:	120w	120w	150w
Refresh Rate(Hz):	1920Hz / 3840 Hz(Optional)	1920Hz	1920Hz
Optimal Viewing Distance:	1--20M	1--20M	3--50M
Life Span:	100,000 Hours	100,000 Hours	100,000 Hours
MTBF:	10,000 Hours	10,000 Hours	10,000 Hours
Control Method:	Asynchronous	Asynchronous	Asynchronous
Control Mode:	3G/4G/WIFI/ Ethernet/ USB	3G/4G/WIFI/ Ethernet/ USB	3G/4G/WIFI/ Ethernet/ USB
Temperature Operating:	-40°~+75°	-40°~+75°	-40°~+75°
Working Humidity:	10%~90%RH	10%~90%RH	10%~90%RH
Protection Rating:	IP65	IP65	IP65
Power Protection;	over-temperature/over-current/	over-temperature/over-current/	over-temperature/over-current/
over-voltage protection:	over-voltage protection	over-voltage protection	
Screen Weight:	19 kg	19 kg	19 kg
Package Dimension:	1100mm(L) X 500mm(H) X 270mm (W)	1100mm(L) X 500mm(H) X 270mm (W)	1100mm(L) X 500mm(H) X 270mm (W)
Gross Weight:	24 kg	24 kg	24 kg
Certificates:	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC

NSELED Europe srl
Via Marco d'Agiate, 41/B
20139 Milano Italia
info@nseled.eu
T. 02 40707210



For more information
www.nseled.eu

