



The NSELED Collection

Transparent LED Displays

Full Color LED Transparent Screen | Stage Transparent Screen |
Window Transparent Screen | Transparent Screen for Glass Bridge




▶ **Product presentation**

NTR SERIES

Extremely Narrow Bezel Design for Easy Installation



Product presentation

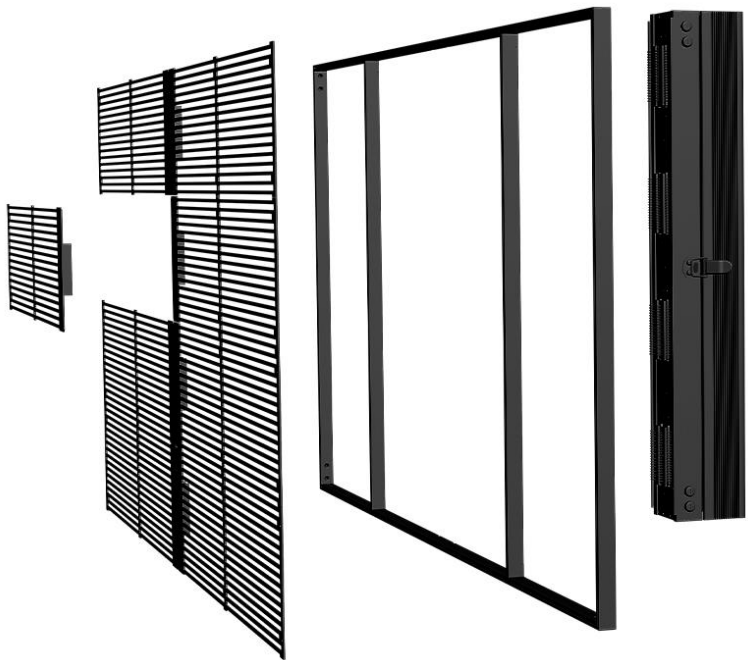

NTR SERIES

Extremely Narrow Bezel Design for Easy Installation



Easy Installation

Modular design makes it easy to assemble and install the cabinet.



Convenient Maintenance

Simple operation, modules can be replaced individually, reducing maintenance costs.



High Stability

New structure to meet the requirements of hoisting, standing, indoor and outdoor use.



Diverse Controls

Remote cluster control for easy control of single and multiple displays simultaneously.



Glass Curtain Wall



Exhibition Showing



Glass Bridge



Sightseeing Elevator



Stage Performance



Business Square

NTR SERIES Parameters

Products	NTR 1	NTR 2	NTR 3.1	NTR 3A	NTR 3	NTR 5	NTR 8	NTR 10	NTR 15
Pixel Pitch	1.9*3.9	2.8*5.6	3.125*3.125	3.9*3.9	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	102,400	64,512	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	160*16	126*32	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	320*160	252*128	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	45%	42%	60%	70%	60%	70%	80%
Brightness	800-3,000	800-6,000	800-3,000	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Cabinet Size	1000*500mm								
Cabinet Weight	10kg/m ²								
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz								
Refresh Rate	≥1,920 Hz								
Operating Temperature	-40°C-45°C								

-----Customizable size, brightness, refresh, color, etc.-----


▶ **Product presentation**

NTE SERIES

Easy to disassemble and carry



Product presentation

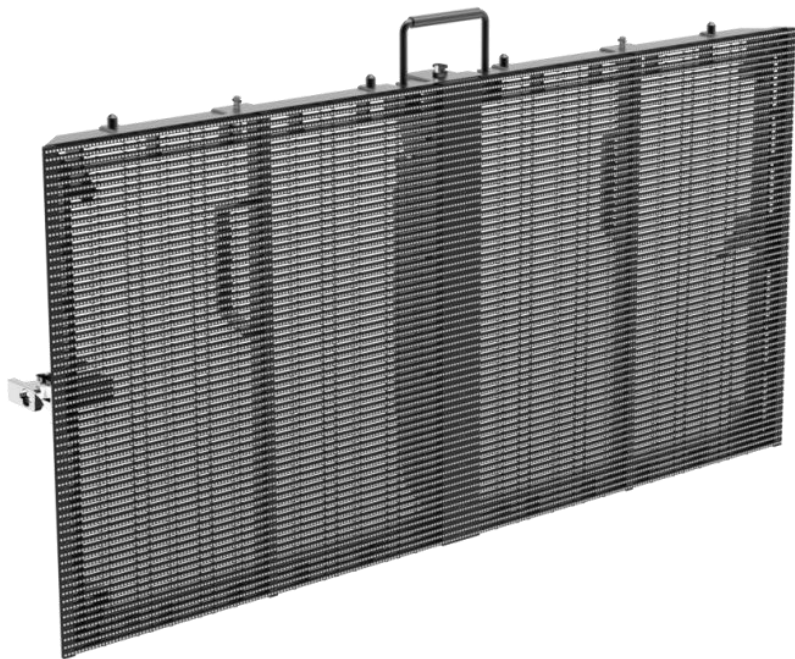

NTE SERIES

Easy to disassemble and carry



Lightweight and stable

Light weight, shockproof and non-deformation ensure the flatness and accuracy of the screen.



Many ways to install

It is extremely easy to install in flat, 90 degrees and 10 degrees angle.



Convenient installation

Convenient disassembly and assembly by quick lock functions on this rental cabinet.



Strong Compatibility

Supporting downloading the APP on your mobile phone or iPad.



Stage Performance



Large Party



Vocal Concert



Auto Show



High end Exhibition




Hotel Banquet

NTE SERIES Parameters

Products	NTE 3
Pixel Pitch	3.91*7.8
Pixel	32,768
Module Resolution	128*16
Cabinet Resolution	256*64
Transparency	50%
Brightness	800-5,000
Cabinet Size	1000*500mm
Cabinet Weight	15kg/m ²
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz
Refresh Rate	≥1,920 Hz
Operating Temperature	-40°C-45°C

-----Customizable size, brightness, refresh, color, etc.-----


▶ **Product presentation**

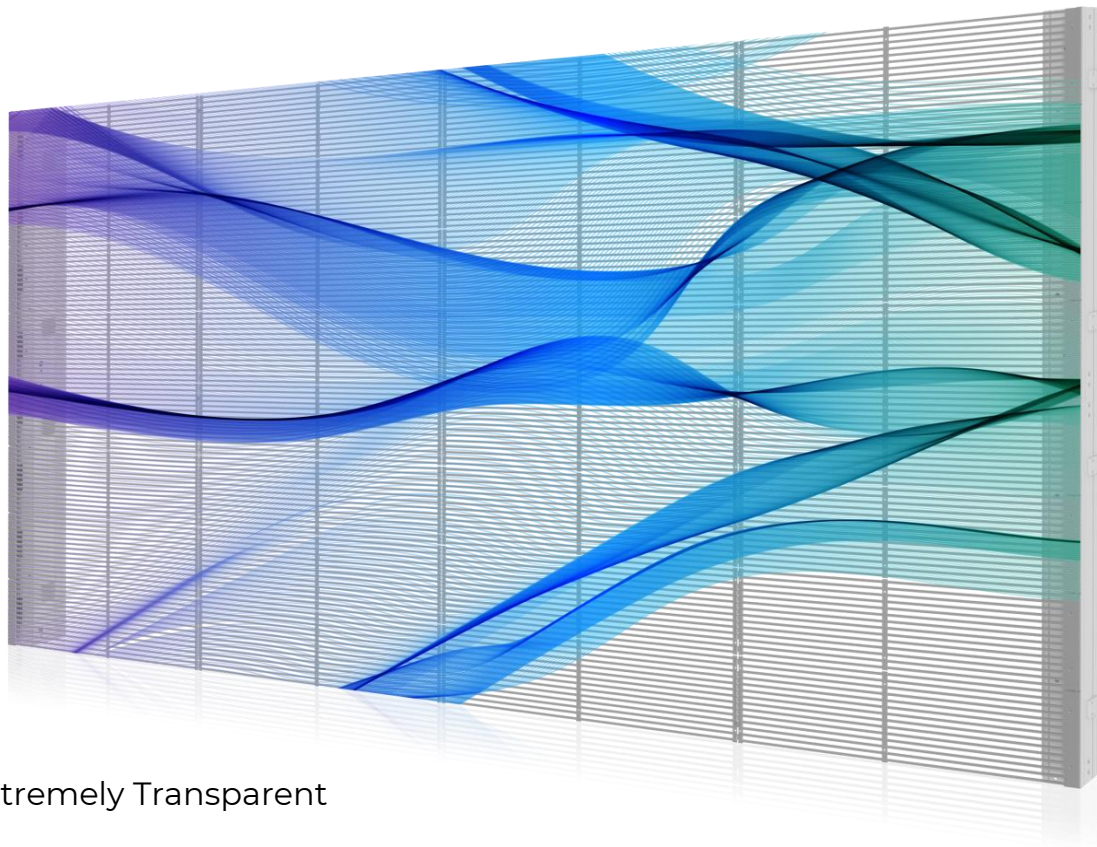

NTM SERIES

Borderless Design, Extremely Transparent

Product presentation

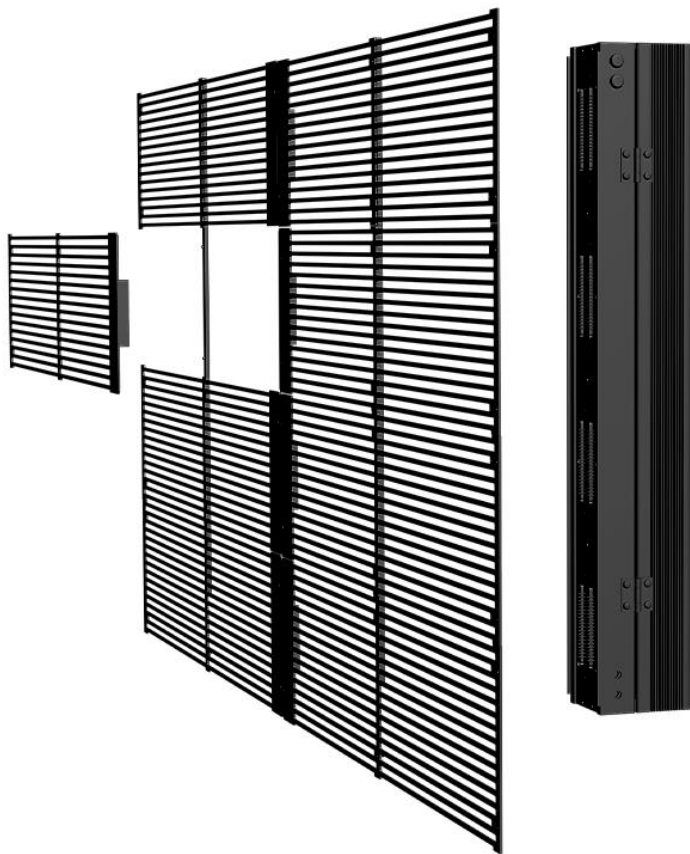

NTM SERIES

Borderless Design, Extremely Transparent



Slim and lightweight

3.5 mm thickness. Product weight is about 7kg/m².



Highly Transparent

Little effect on lighting perspective of glass curtain wall.



Modular Design

Modular design makes it easy to assemble and install the cabinet.



Wide perspective

160 °viewing angle to attract more viewers.



Window Display



Exhibition Display



Broadcasting Room



Space Design



Interiors Hall



Stage Performance


NTM SERIES Parameters

Products	NTM 1	NTM 2	NTM 3.1	NTM 3A	NTM 3	NTM 5	NTM 8	NTM 10	NTM 15
Pixel Pitch	1.9*3.9	2.8*5.6	3.125*3.125	3.9*3.9	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	102,400	64,512	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	160*16	126*32	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	320*160	252*128	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	45%	42%	65%	75%	65%	75%	85%
Brightness	800-3,000	800-6,000	800-3,000	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Cabinet Size	1000*500mm								
Cabinet Weight	7kg/m ²								
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz								
Refresh Rate	≥1,920 Hz								
Operating Temperature	-40°C-45°C								


-----Customizable size, brightness, refresh, color, etc.-----

NTS SERIES

Flexible Frame Design, Supporting Bending Installation

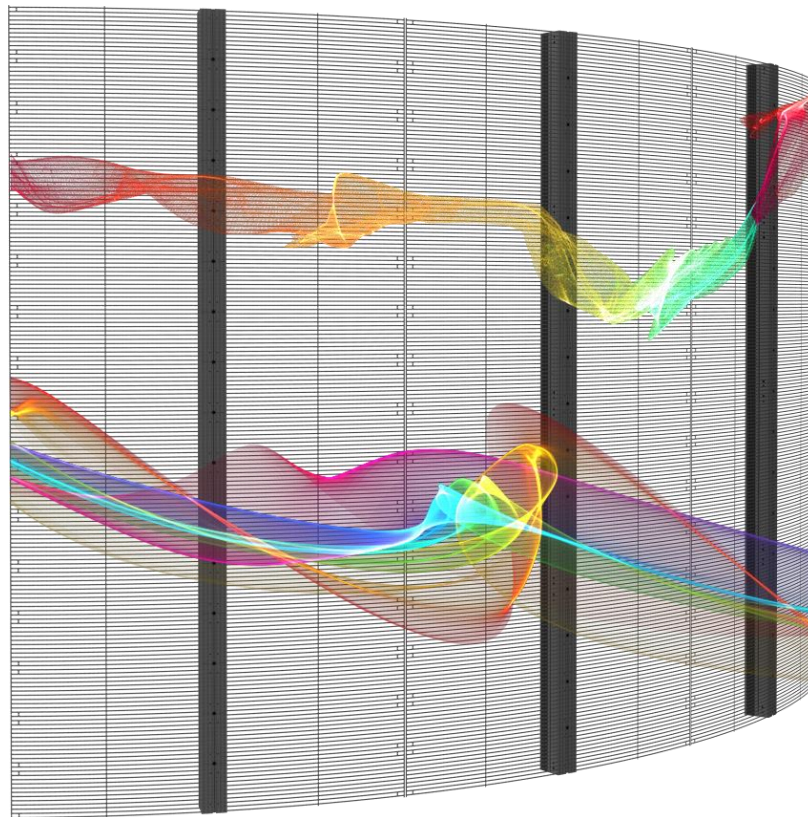

Product presentation

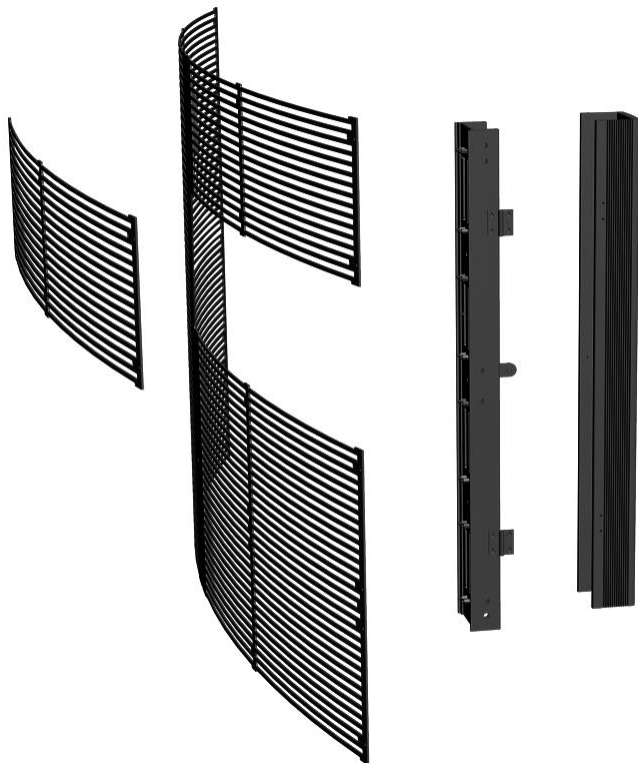

NTS SERIES

Flexible Frame Design, Supporting Bending Installation



Flexible Frame Design

Supporting curved installation, providing curved art and wide viewing angle.



Slim and lightweight

3.5 mm thickness. Product weight is about 7kg/m².



Highly Transparent

Highly transparent, with little effect on light transmission of glass curtain wall.



Customizable

Solution can be customized according to different site size to make full use of the site.



Glass curtain wall



Exhibition Display



Indoor Hall



Sightseeing Elevator



Stage Performance




Broadcasting Room

NTS SERIES Parameters

Products	NTS 1	NTS 2	NTS 3	NTS 5	NTS 8	NTS 10	NTS 15
Pixel Pitch	1.9*3.9	2.8*5.6	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	65%	75%	65%	75%	85%
Brightness	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Min Diameter	2550mm	1910mm	1270mm	950mm	640mm	640mm	640mm
Cabinet Weight	7kg/m ²						
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz						
Refresh Rate	≥1,920 Hz						
Operating Temperature	-40°C-45°C						


-----Customizable size, brightness, refresh, color, etc.-----

▶ **Product presentation**

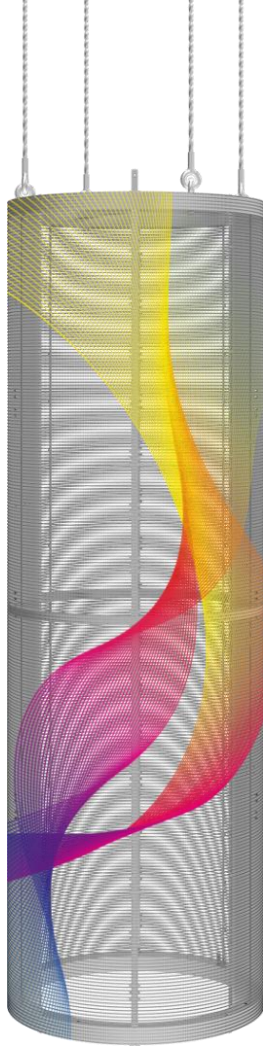

KTDORIC SERIES

Cylindrical Ceiling Design, Art Display

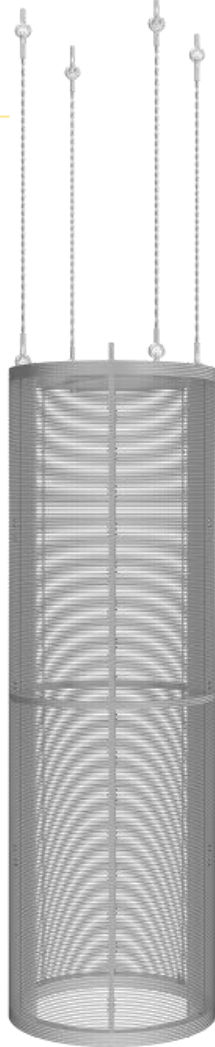

NTDORIC SERIES

Cylindrical Ceiling Design, Art Display



Bending Module

Flexible frame design, support for curved installation, providing a variety of artistic effects.



Customizable

Solution can be customized according to different site size to make full use of the site.



Slim and Lightweight cabinet

3.5 mm thickness. Product weight is about 6kg/m².



360 ° vision

360 ° view to meet the needs of multiple art displays.



Shopping Mall Atrium



Conference Hall



Hotel Lobby



Stage Performance



Airport Hall




Exhibition Hall

NTDORIC SERIES Parameters

Products	NTD 1	NTD 2	NTD 3	NTD 5	NTD 8	NTD 10	NTD 15
Pixel Pitch	1.9*3.9	2.8*5.6	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	65%	75%	65%	75%	85%
Brightness	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Min Diameter	2550mm	1910mm	1270mm	950mm	640mm	640mm	640mm
Cabinet Weight	12kg/m ²						
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz						
Refresh Rate	≥1,920 Hz						
Operating Temperature	-40°C-45°C						

-----Customizable size, brightness, refresh, color, etc.-----


▶ **Product presentation**

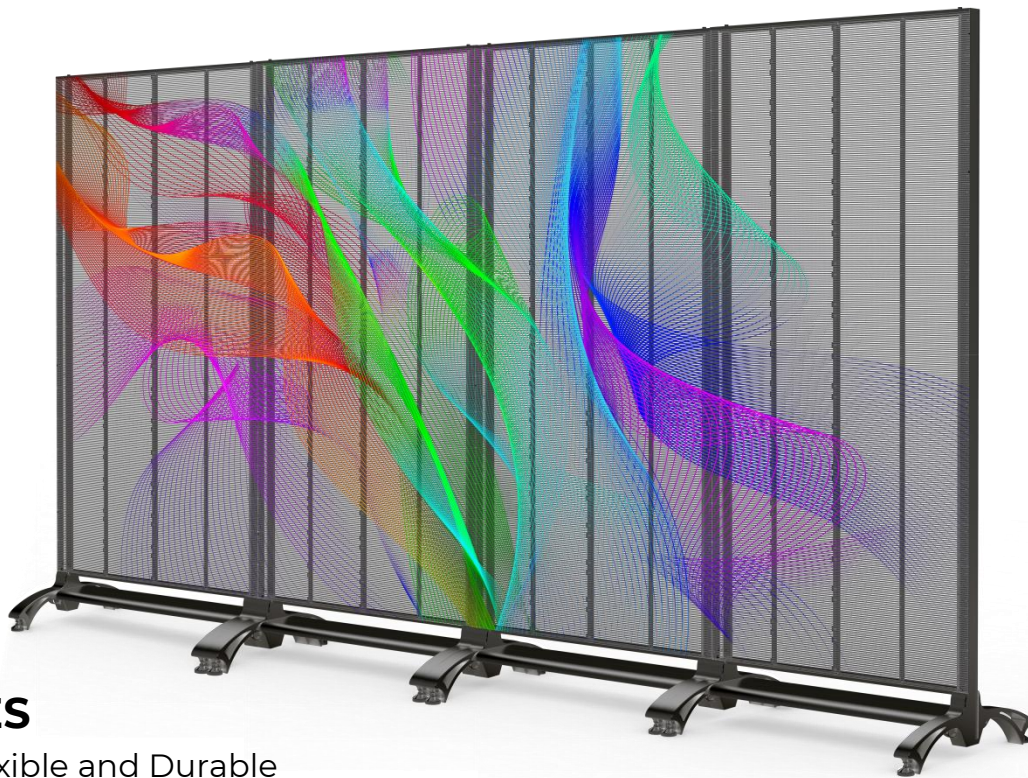

TPOSTER SERIES

Mobile AD Player, Flexible and Durable

Product presentation

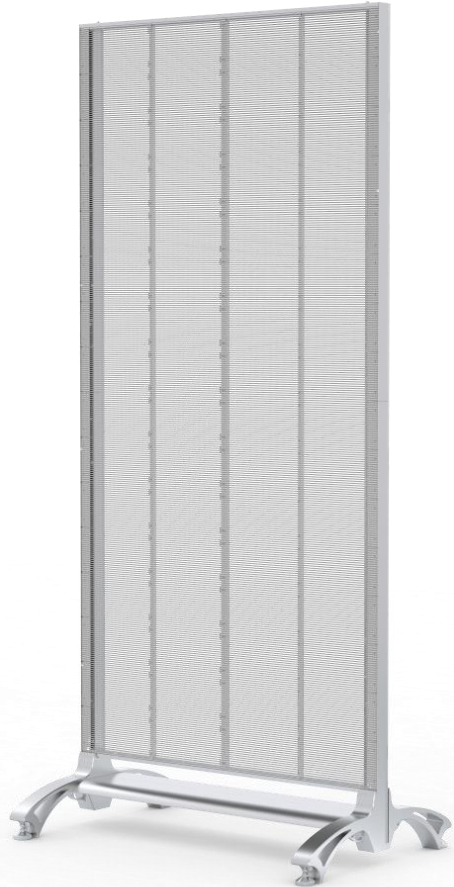

TPOSTER SERIES

Mobile AD Player, Flexible and Durable



Convenient Installation

Convenient installation with modular design. It is easy to assemble and install the cabinet.



Strong Compatibility

Supporting downloading the APP on your mobile phone or iPad.



Mobility

Supporting multiple installation methods. The machine can be suspended, seated and movable according to requirements.



Diverse control

Remote cluster control makes it easy to control single and multiple displays simultaneously.



Shop Counters



Interior Hall



Indoor Hallway



Conference Venue



Office Space



Exhibition Display

TPOSTER SERIES Parameters

Products	NTP 1	NTP 2	NTP 3	NTP 5	NTP 8	NTP 10
Pixel Pitch	1.9*3.9	2.8*5.6	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4
Pixel	129,024	61,952	32,768	18,432	16,384	9,216
Module Resolution	252*16	176*22	128*16	96*12	64*16	48*12
Cabinet Resolution	504*128	352*88	256*64	192*48	128*64	96*48
Transparency	42%	45%	60%	70%	60%	70%
Brightness	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Cabinet Size	1000*2000*500mm					
Cabinet Weight	Including standing base, 30kg for 2sqm cabinet or 45kg for 4sqm cabinet					
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz					
Refresh Rate	≥1,920 Hz					
Operating Temperature	-40°C-45°C					


-----Customizable size, brightness, refresh, color, etc.-----

▶ **Product presentation**



NTO NT-Oasis Pro Waterproof Series

NTO NT-Oasis Pro Waterproof Series

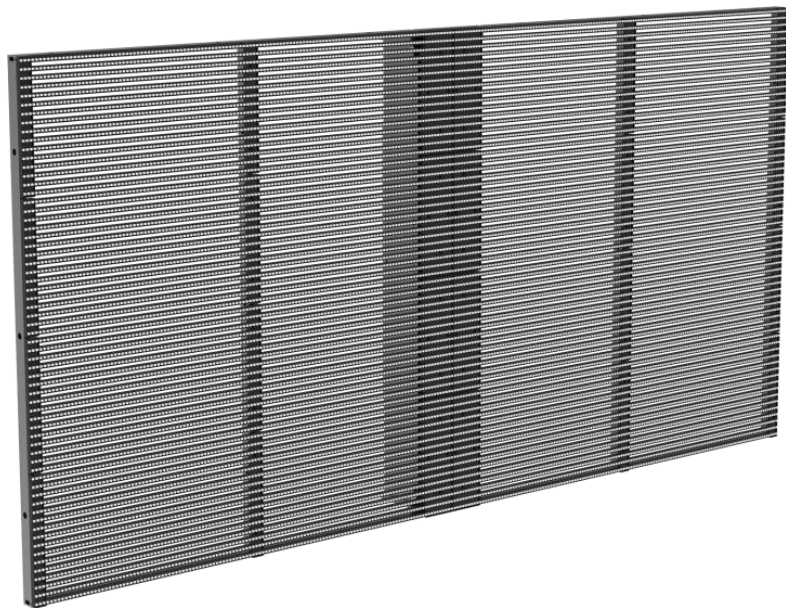

Waterproof and moisture-proof

Glue filling design to form a waterproof protective layer for the entire box body,
Outdoor screen protection level \geq IP65



Anti-high temperature, anti-exposure

The outdoor screen must have the function of preventing the sun and rain, and the maximum temperature of the sun can reach 50 °C



Fully customized

Can be customized according to site size and make full use of the venue



Modular design

Modular design, easy to assemble and install



Building Exterior



Entrance Sign



Digital Poster



Outdoor Billboard



Bus Station




Outdoor Event

NTO-Oasis Pro Series Parameters

Products	NTO Pro 3	NTO Pro 5	NTO Pro 8	NTO Pro 10
Pixel Pitch	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4
Pixel	32,768	18,432	16,384	9,216
Module Resolution	128*16	96*12	64*16	48*12
Cabinet Resolution	256*64	192*48	128*64	96*48
Transparency	30%	35%	40%	45%
Brightness	800-5,500	800-5,500	800-5,500	800-5,500
Cabinet Size	1000*500mm			
Cabinet Weight	15kg/m ²			
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz			
Refresh Rate	≥1,920 Hz			
Operating Temperature	-40°C-45°C			

-----Customizable size, brightness, refresh, color, etc.-----


▶ **Product features**

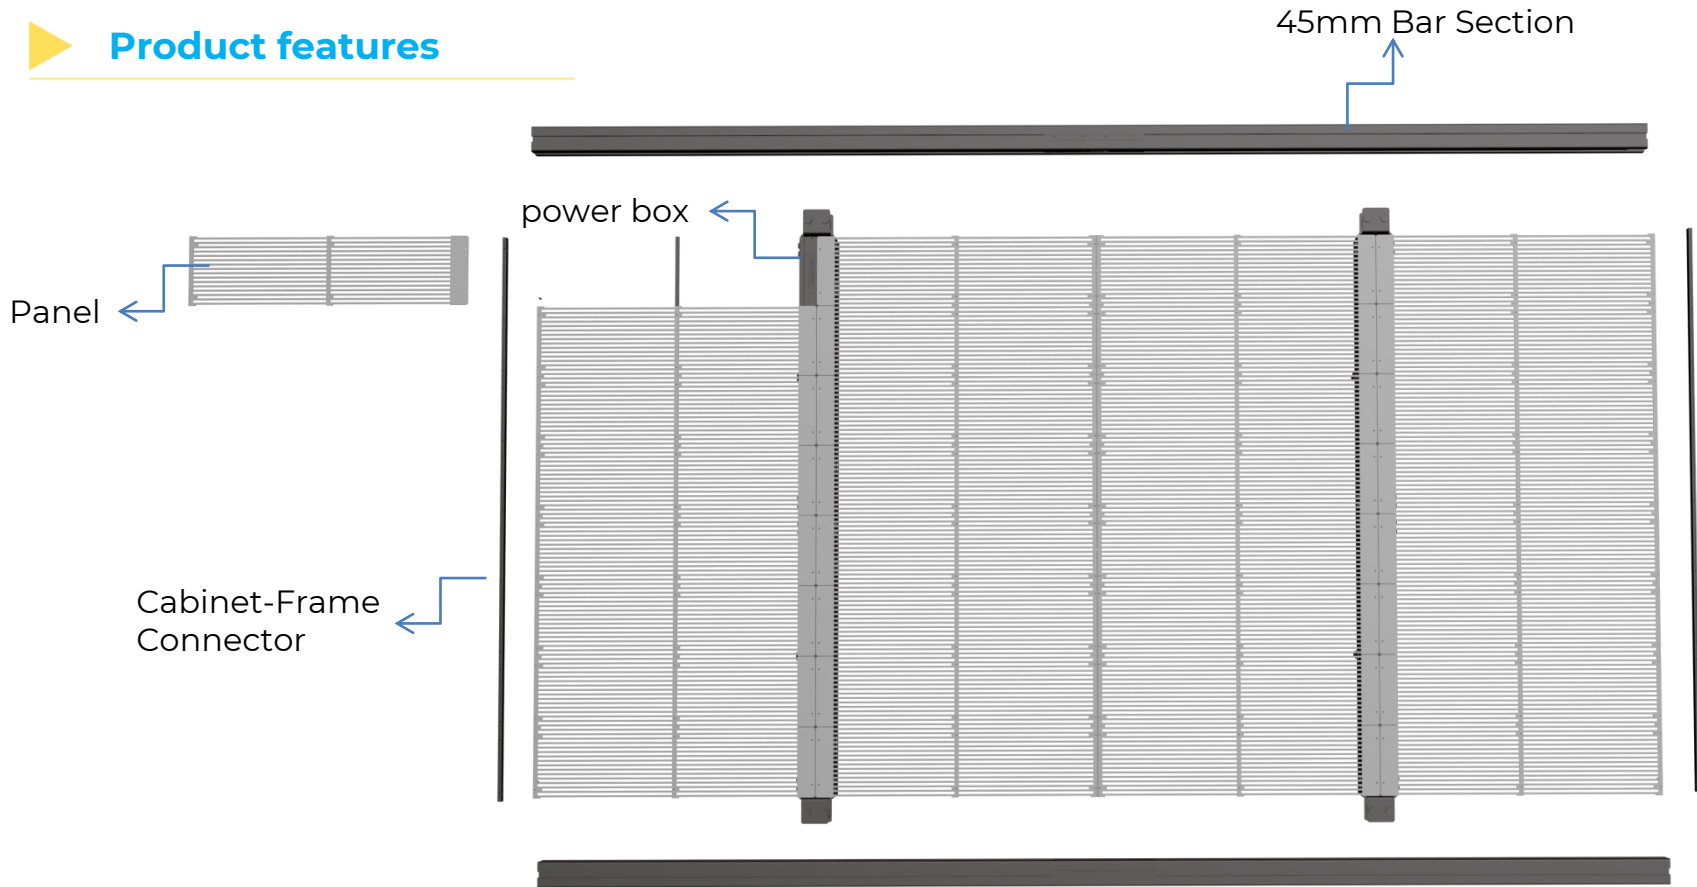

Modular design, easy installation


▶ **Product features**

Slim design, slim and light

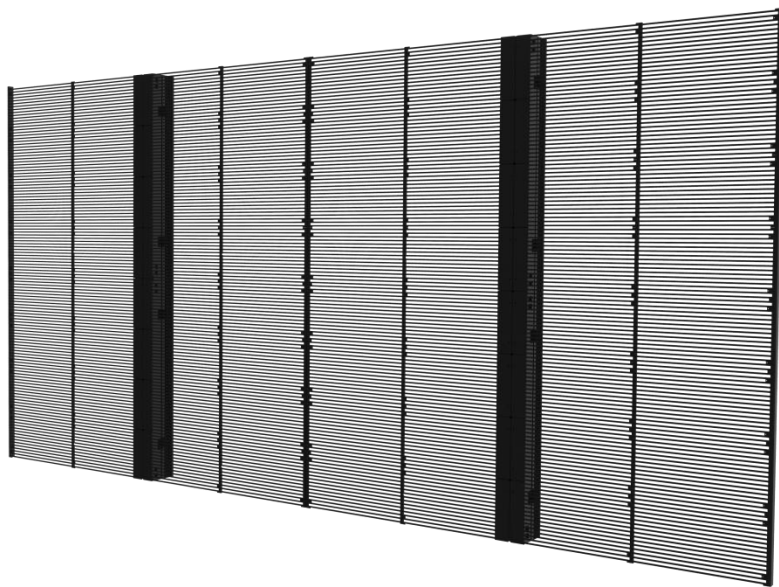


61mm

Product features

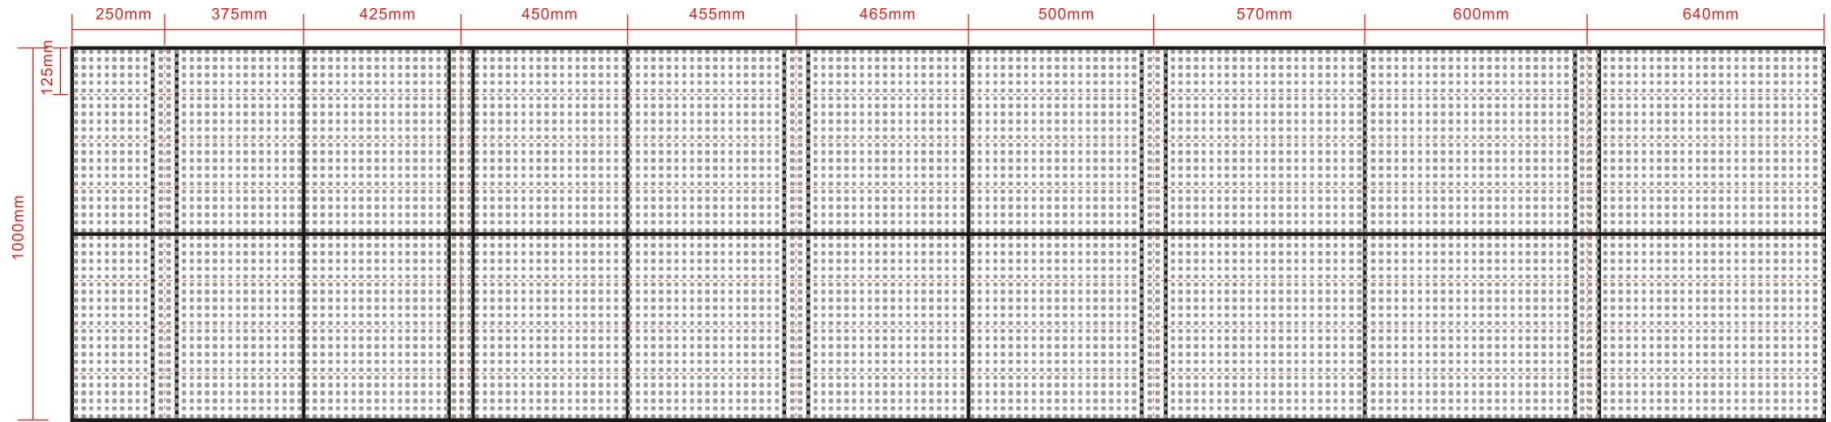

Splice in **any size** to make full use of the venue

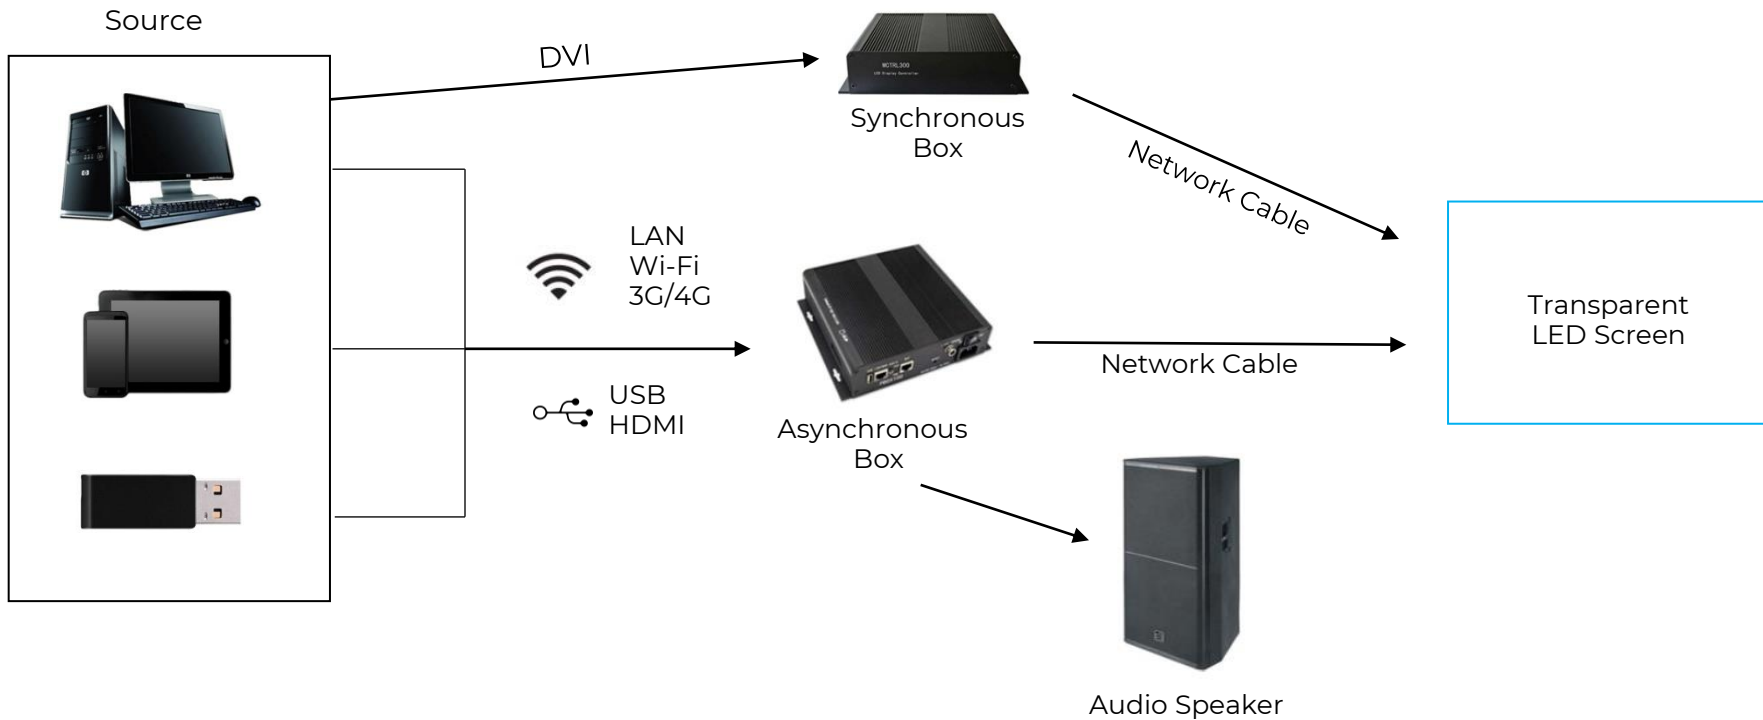

▶ Product comparison




NSELED LED
Transparent Screen




Other Transparent Screens
on the Market

The display quality of NSELED screen is still as full-color and high-definition as it was after three years of use; Under the same using time, picture color becomes dark and its quality is not clear if using other brands of led screens on the market.


▶ Product comparison

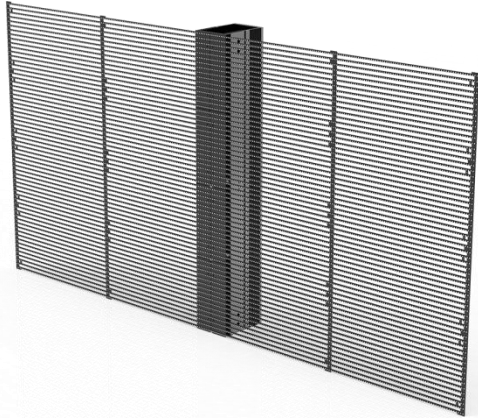

NSELED taransparent
Screen
Weight : 6KG/m²-10KG/m²

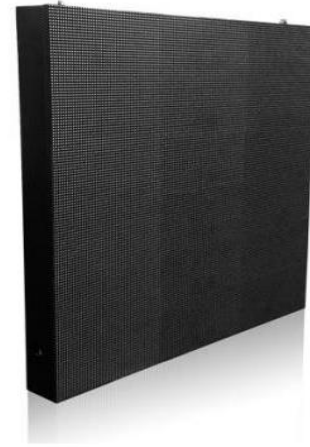

Traditional LED Screen
Weight>50KG




03

CASE STUDY

▶ Case Study

Shopping Mall

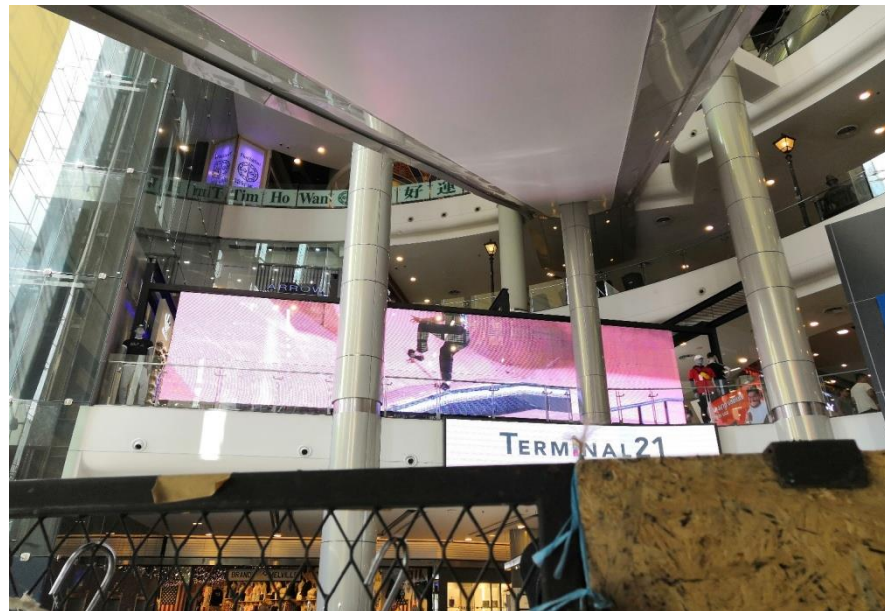

Adidas Store

Project Size: 27.5m2

Product Info: Model KTR, P3.9

Location: Thailand

▶ Case Study

Shopping Mall



Tokyo Ginza



Project Size: 74m2

Product Info: Model KTR, P10

Location: Tokyo, Japan

▶ Case Study

Shopping Mall

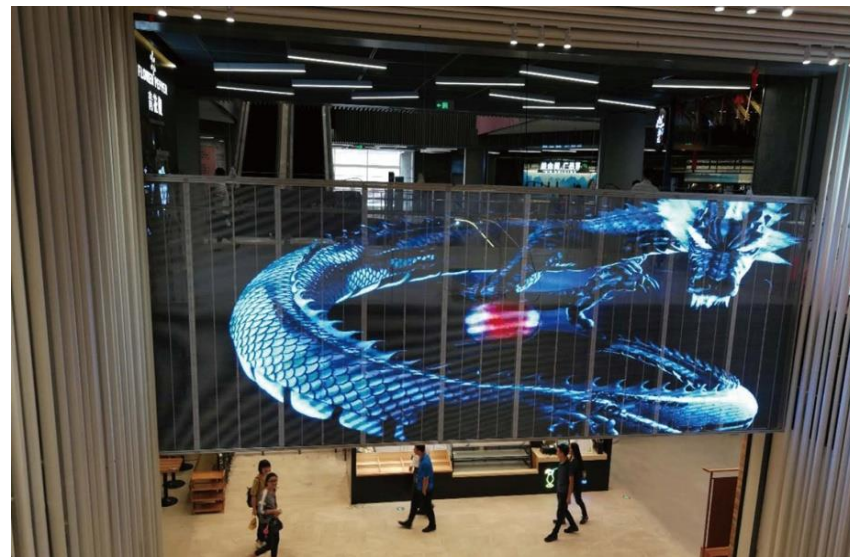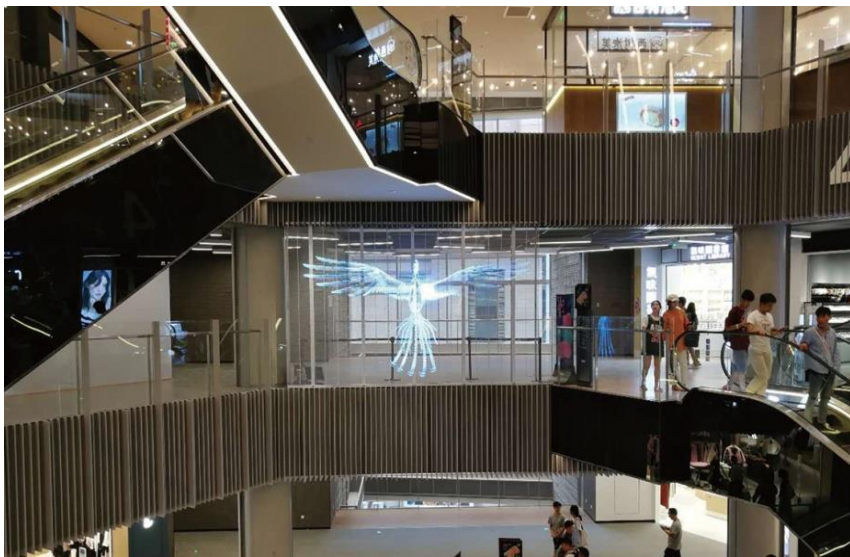

Shanghai Mall

Project Size: 15+25.5m²

Product Info: Model KTM, P3.9

Location: Shanghai, China

▶ Case Study

Retail area



Estée Lauder Airport Store

Project Size: 4+4+4m2

Product Info: Model KTP(double-sided), KTM, KTS

Location: Singapore, Thailand, Shanghai, Hongkong

▶ Case Study

Shopping Mall



Seafood Market

Project Size: 4.5m2

Product Info: Model KTO, P3.9

Location: Kobe, Japan



Office Window

Project Size: 4m2

Product Info: Model KTS, KTM P3.9

Location: Tokyo, Japan

▶ Case Study

Glass elevator



Tangshan Science and Technology Museum Elevator

Project Size: 180m²

Product Info: Model KTM, P3.9

Location: Tangshan City, Hebei, China



Shopping Mall Elevator

Project zSize: 115.5m²

Product Info: Model KTR, P10

Location: Guangzhou, Guangdong, China

▶ Case Study

Museum



Dutch Science And Technology Museum

Project Size: 60m²

Product Info: Model KTR, P3.9

Location: Netherlands



Haiyan Museum

Project Size: 106m²

Product Info: Model KTR, P3.9

Location: Yancheng, Jiangsu, China

▶ Case Study

Museum



Dongguan International Trade Center

Project Size: 128m²

Product Info: Model KTM, P7.8

Location: Dongguan, China

▶ Case Study

Bank



Bank

Project Size: 2.25m²

Product Info: Model KTR, P3.9

Location: Tokyo, Japan

▶ Case Study

Bank



RHB BANK

Project Size: 12.5m2

Product Info: Model KTR, P3.9

Location: Singapore

▶ Case Study

Railway Station Hall



Changshan Railway Station

Project Size: 724.5m²

Product Info: Model KTP, P3.125

Location: Changsha, Hunan,
China

▶ Case Study

Access Area - Port



Macau Port

Project Size: 1m2

Product Info: Model KTR, P2.8

Location: Macau

▶ Case Study

Supermarket – rental



Mall Entrance


Project Size: 4m2

Product Info: Model KTR, P2.8

Location: Czech Republic

▶ Case Study

Waiting area

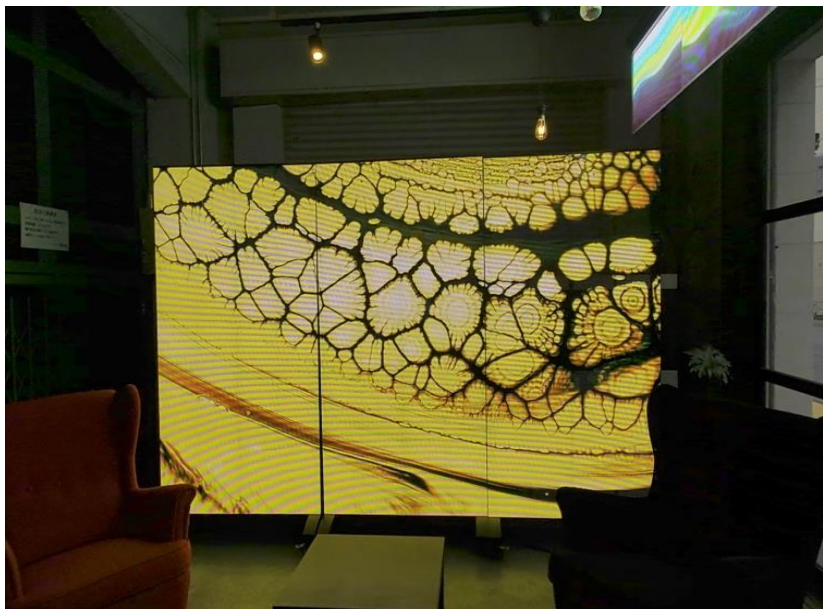

Show Room

Project Size: 6m2

Product Info: Model KTP, P1.9

Location: Tokyo, Japan



Kyoto Station

Project Size: 2m2

Product Info: Model KTP, P2.8

Location: Kyoto, Japan



► NSELED Europe srl
Via Marco d'Agate, 41/B
20139 Milano Italia
info@nseled.eu
T. +39 02 40707210



For more information
www.nseled.eu