



Click here to  
**REQUEST  
INFORMATION**



# TRANSPARENT LED Display


Full Color LED  
Transparent Screen  
Stage Transparent Screen  
Window Transparent Screen




**Stock in Milan**

# ▶ PRODUCT PRESENTATION

▷ **NTR SERIES**  
Extremely Narrow Bezel Design  
for Easy Installation

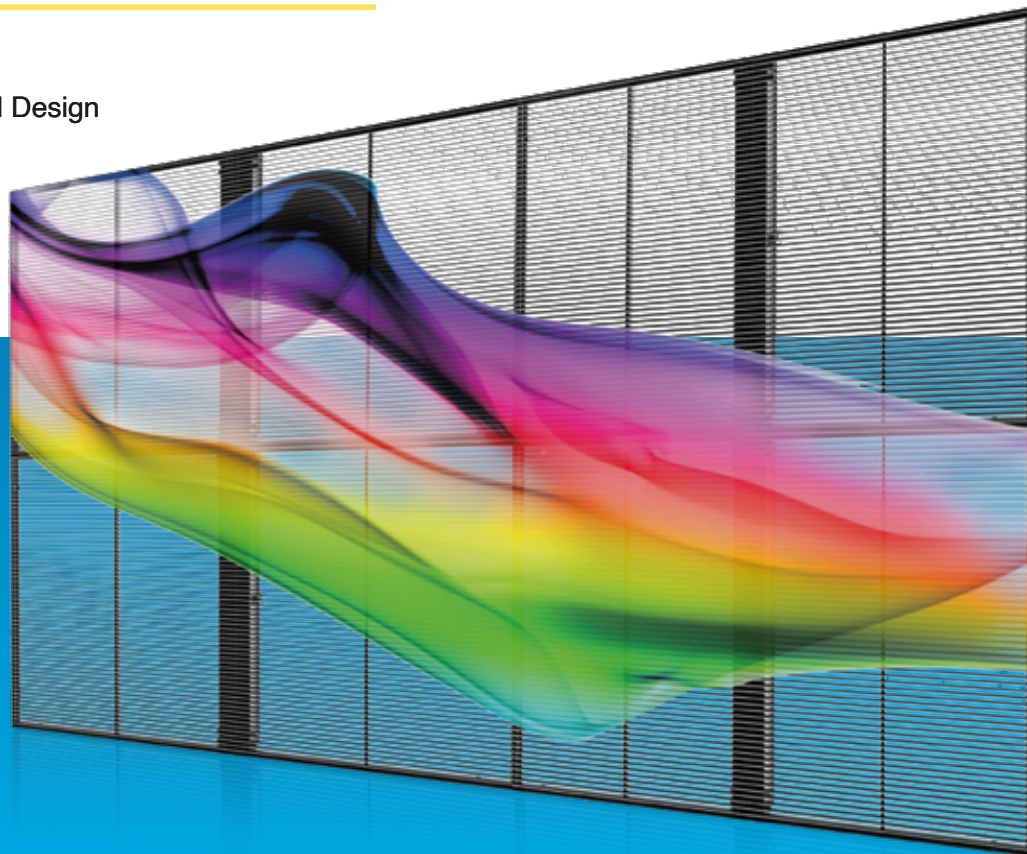

# ▶ PRODUCT PRESENTATION

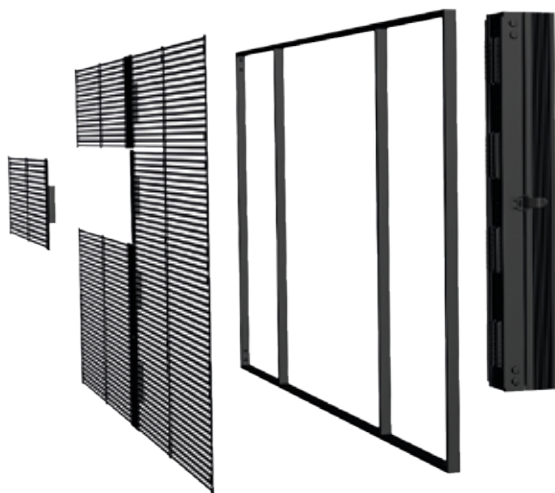

## NTR SERIES

Extremely Narrow Bezel Design for Easy Installation



### Easy Installation

Modular design makes it easy to assemble and install the cabinet.



### Convenient Maintenance

Simple operation, modules can be replaced individually, reducing maintenance costs.



### High Stability

New structure to meet the requirements of hoisting, standing, indoor and outdoor use.



### Diverse Controls

Remote cluster control for easy control of single and multiple displays simultaneously.

Glass Curtain Wall

Exhibition Showing

Stage Performance

Glass Bridge

Sightseeing Elevator



TRANSPARENT LED

## NTR SERIES Parameters

PRODUCTS	NTR 1	NTR 2	NTR 3.1	NTR 3A	NTR 3	NTR 5	NTR 8	NTR 10	NTR 15
Pixel pitch	1.9*3.9	2.8*5.6	3.125*3.125	3.9*3.9	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	102,400	64,512	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	160*16	126*32	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	320*160	252*128	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	45%	42%	60%	70%	60%	70%	80%
Brightness	800-3,000	800-6,000	800-3,000	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Cabinet Size	1000*500mm								
Cabinet Weight	10kg/m <sup>2</sup>								
Power Requirements	100V~240V±10%; AC 50/60 Hz								
Refresh Rate	≥1,920 Hz								
Operating Temperature	-40°C-45°C								
Customizable size, brightness, refresh, color, etc...									


# ▶ PRODUCT PRESENTATION

- ▶ **NTE SERIES**  
Easy to disassemble  
and carry





# ▶ PRODUCT PRESENTATION

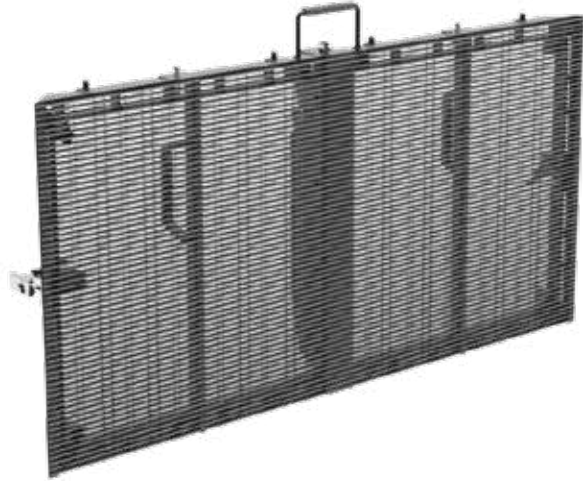

## NTE SERIES

Easy to disassemble and carry



### Lightweight and stable

Light weight, shockproof and non-deformation ensure the flatness and accuracy of the screen.



### Many ways to install

It is extremely easy to install in flat, 90 degrees and 10 degrees angle.



### Convenient installation

Convenient disassembly and assembly by quick lock functions on this rental cabinet.



### Strong Compatibility

Supporting downloading the APP on your mobile phone or iPad.

Stage Performance

Large Party

Vocal Concert

Auto Show

High end Exhibition

TRANSPARENT LED




## NTE SERIES Parameters

PRODUCTS	NTM 3
Pixel pitch	3.91 *7.8
Pixel	32,768
Module Resolution	128*16
Cabinet Resolution	256*64
Transparency	50%
Brightness	800-5,000
Cabinet Size	1000 *500mm
Cabinet Weight	15kg/m <sup>2</sup>
Power Requirements	100V~240V±10%; AC 50/60 Hz
Refresh Rate	≥1,920 Hz
Operating Temperature	-40°C-45°C
Customizable size, brightness, refresh, color, etc...	


# ▶ PRODUCT PRESENTATION

▷ **NTM SERIES**  
Borderless Design,  
Extremely Transparent

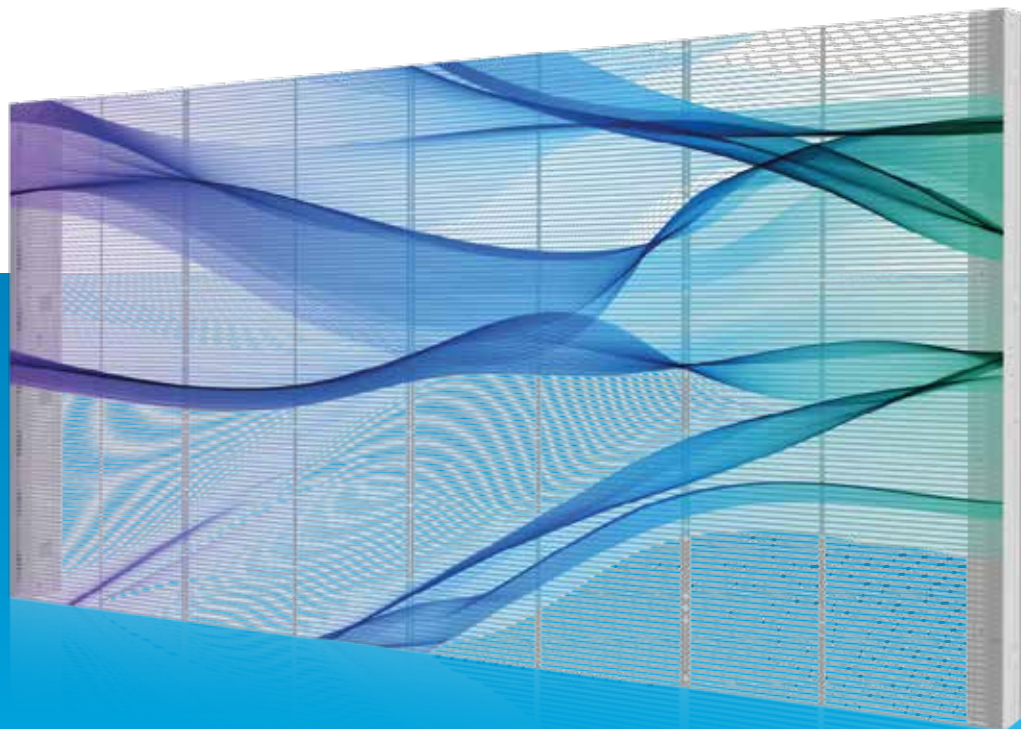



# ▶ PRODUCT PRESENTATION

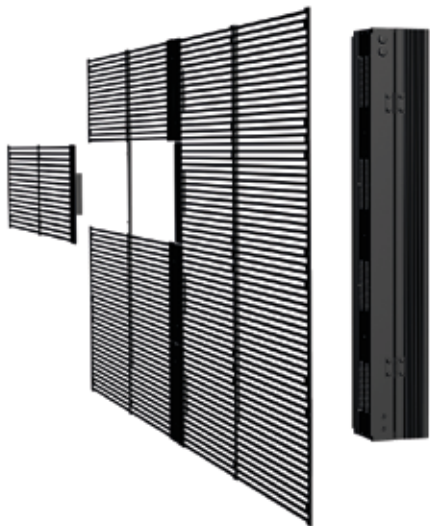

## NTM SERIES

Borderless Design, Extremely Transparent



### Slim and lightweight

3.5 mm thickness. Product weight is about 7kg/m<sup>2</sup>.



### Highly Transparent

Little effect on lighting perspective of glass curtain wall.



### Modular Design

Modular design makes it easy to assemble and install the cabinet.



### Wide perspective

160 °viewing angle to attract more viewers.

Window Display




Exhibition Display



Broadcasting Room



Space Design



Interiors Hall




TRANSPARENT LED

## NTM SERIES Parameters

PRODUCTS	NTM 1	NTM 2	NTM 3.1	NTM 3A	NTM 3	NTM 5	NTM 8	NTM 10	NTM 15
Pixel pitch	1.9*3.9	2.8*5.6	3.125*3.125	3.9*3.9	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	102,400	64,512	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	160*16	126*32	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	320*160	252*128	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	45%	42%	65%	75%	65%	75%	85%
Brightness	800-3,000	800-6,000	800-3,000	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Cabinet Size	1000*500mm								
Cabinet Weight	7kg/m <sup>2</sup>								
Power Requirements	100V~240V±10%; AC 50/60 Hz								
Refresh Rate	≥1,920 Hz								
Operating Temperature	-40°C-45°C								
Customizable size, brightness, refresh, color, etc...									

# ▶ PRODUCT PRESENTATION

▷ **NTS SERIES**  
Flexible Frame Design,  
Supporting Bending Installation

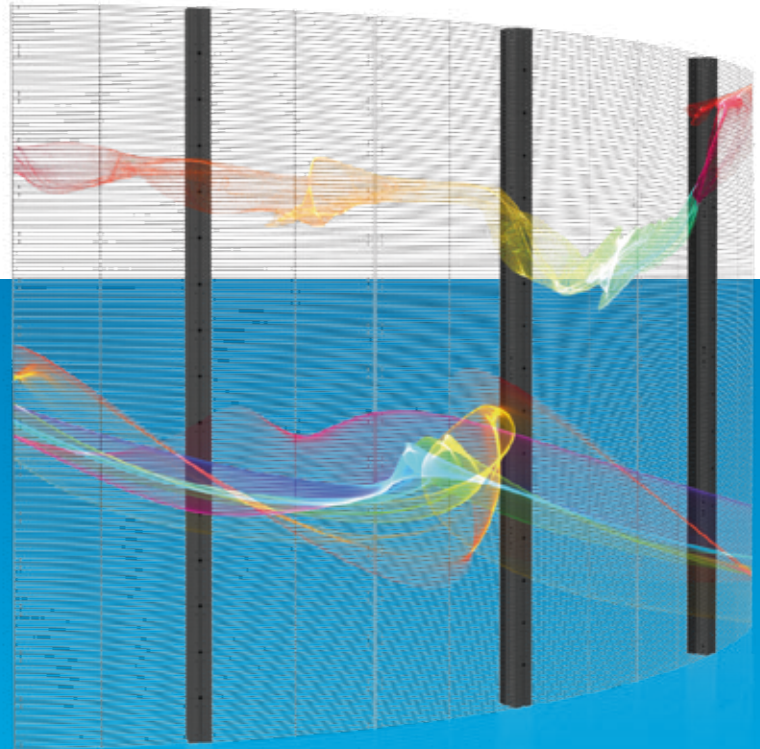

# ▶ PRODUCT PRESENTATION



## NTS SERIES

Flexible Frame Design, Supporting Bending Installation



### Flexible Frame Design

Supporting curved installation, providing curved art and wide viewing angle.



### Slim and lightweight

3.5 mm thickness. Product weight is about 7kg/m<sup>2</sup>.



### Highly Transparent

Highly transparent, with little effect on light transmission of glass curtain wall.



### Customizable

Solution can be customized according to different site size to make full use of the site.

Glass curtain wall

Exhibition Display

Indoor Hall

Sightseeing Elevator

Stage Performance


TRANSPARENT LED

## NTS SERIES Parameters

PRODUCTS	NTS 1	NTS 2	NTS 3	NTS 5	NTS 8	NTS 10	NTS 15
Pixel pitch	1.9*3.9	2.8*5.6	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4	15.625*15.625
Pixel	129,024	61,952	32,768	18,432	16,384	9,216	4,096
Module Resolution	252*16	176*22	128*16	96*12	64*16	48*12	32*8
Cabinet Resolution	504*128	352*88	256*64	192*48	128*64	96*48	64*32
Transparency	42%	45%	65%	75%	65%	75%	85%
Brightness	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Min Diameter	2550 mm	1910 mm	1270 mm	950 mm	640 mm	640 mm	640 mm
Cabinet Weight	7kg/m <sup>2</sup>						
Power Requirements	100V~240V±10%; AC 50/60 Hz						
Refresh Rate	≥1,920 Hz						
Operating Temperature	-40°C-45°C						
	Customizable size, brightness, refresh, color, etc...						

# ▶ PRODUCT PRESENTATION


▷ **TPOSTER SERIES**  
Mobile AD Player,  
Flexible and Durable

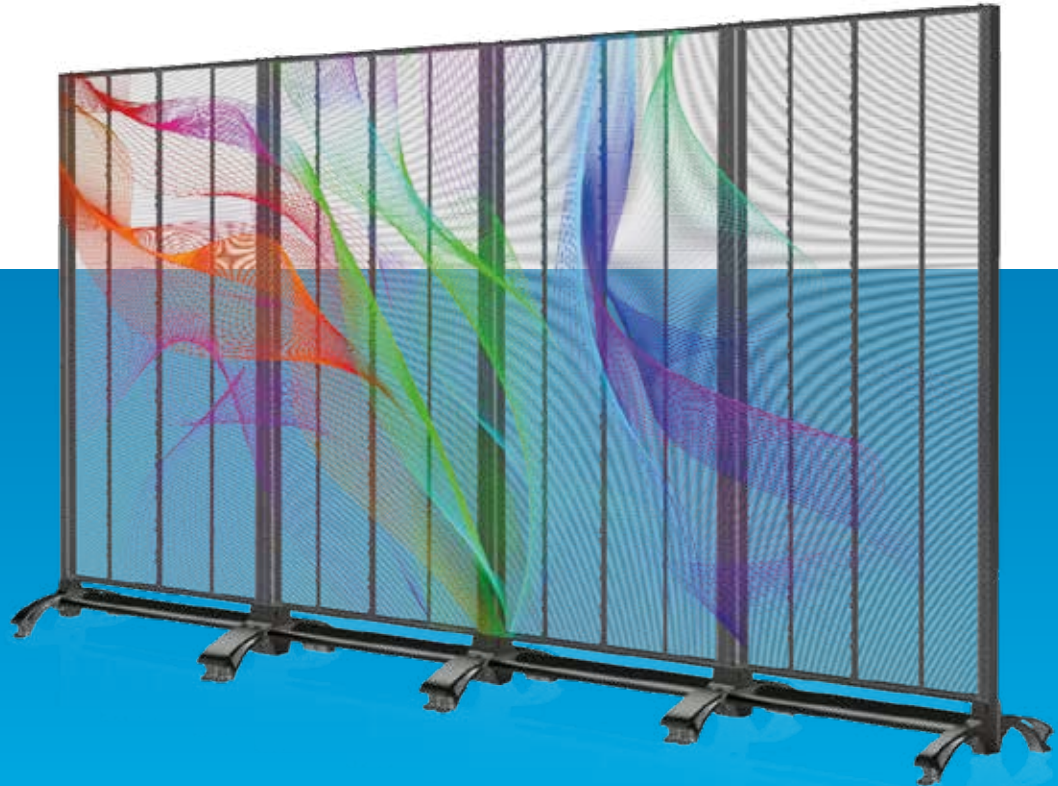

▼  
TRANSPARENT LED



# ▶ PRODUCT PRESENTATION

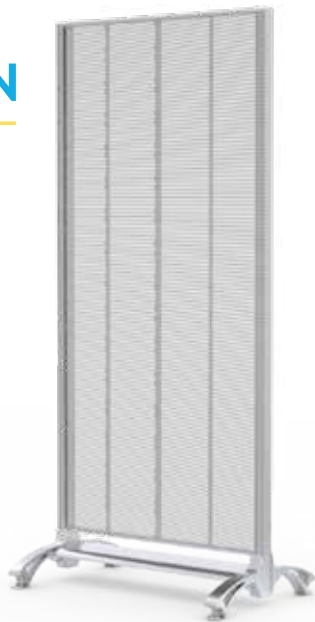

## TPOSTER SERIES

Mobile AD Player, Flexible and Durable



### Convenient Installation

Convenient installation with modular design. It is easy to assemble and install the cabinet.



### Strong Compatibility

Supporting downloading the APP on your mobile phone or iPad.



### Mobility


Supporting multiple installation methods. The machine can be suspended, seated and movable according to requirements.



### Diverse control

Remote cluster control makes it easy to control single and multiple displays simultaneously.

### Shop Counters



### Interior Hall



### Indoor Hallway



### Conference Venue



### Office Space



TRANSPARENT LED

## TPOSTER SERIES Parameters

PRODUCTS	NTP 1	NTP 2	NTP 3	NTP 5	NTP 8	NTP 10
Pixel pitch	1.9*3.9	2.8*5.6	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4
Pixel	129,024	61,952	32,768	18,432	16,384	9,216
Module Resolution	252*16	176*22	128*16	96*32	64*16	48*12
Cabinet Resolution	504*128	352*88	256*64	192*48	128*64	96*48
Transparency	42%	45%	60%	70%	60%	70%
Brightness	800-3,000	800-6,000	800-6,000	800-6,000	800-6,000	800-6,000
Cabinet Size	1000*2000*500mm					
Cabinet Weight	Including standing base, 30kg for 2sqm cabinet or 45kg for 4sqm cabinet					
Power Requirements	100V~240V±10%; AC 50/60 Hz					
Refresh Rate	≥1,920 Hz					
Operating Temperature	-40°C-45°C					
Customizable size, brightness, refresh, color, etc...						

# ▶ PRODUCT PRESENTATION


## ▷ NTO NT-Oasis Pro Waterproof Series



# ▶ PRODUCT PRESENTATION

## NTO NT-Oasis Pro Waterproof Series

Mobile AD Player, Flexible and Durable

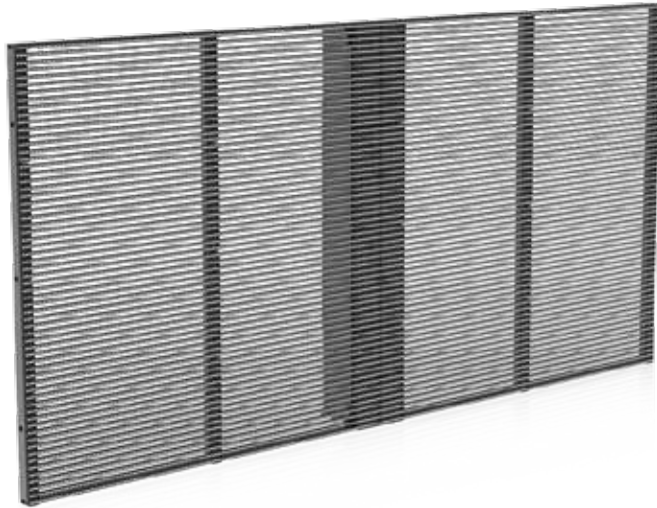

### Waterproof and moisture-proof

Glue filling design to form a waterproof protective layer for the entire box body, Outdoor screen protection level  $\geq$  IP65



### Anti-high temperature, anti-exposure

The outdoor screen must have the function of preventing the sun and rain, and the maximum temperature of the sun can reach 50 °C



### Fully customized

Can be customized according to site size and make full use of the venue



### Modular design

Modular design, easy to assemble and install

Building Exterior

Entrance Sign

Digital Poster


Outdoor Billboard

Bus Station

TRANSPARENT LED

## NTO-OASIS PRO WATERPROOF SERIES Parameters

PRODUCTS	NTO Pro 3	NTO Pro 5	NTO Pro 8	NTO Pro 10
Pixel pitch	3.91*7.8	5.2*10.4	7.8*7.8	10.4*10.4
Pixel	32,768	18,432	16,384	9,216
Module Resolution	128*16	96*12	64*16	48*12
Cabinet Resolution	256*64	192*48	128*64	96*48
Transparency	30%	35%	40%	45%
Brightness	800-5,500	800-5,500	800-5,500	800-5,500
Cabinet Size	1000*500mm			
Cabinet Weight	15kg/m <sup>2</sup>			
Power Requirements	100V~240V±10%; AC 50/60 Hz			
Refresh Rate	≥1,920 Hz			
Operating Temperature	-40°C-45°C			
Customizable size, brightness, refresh, color, etc...				

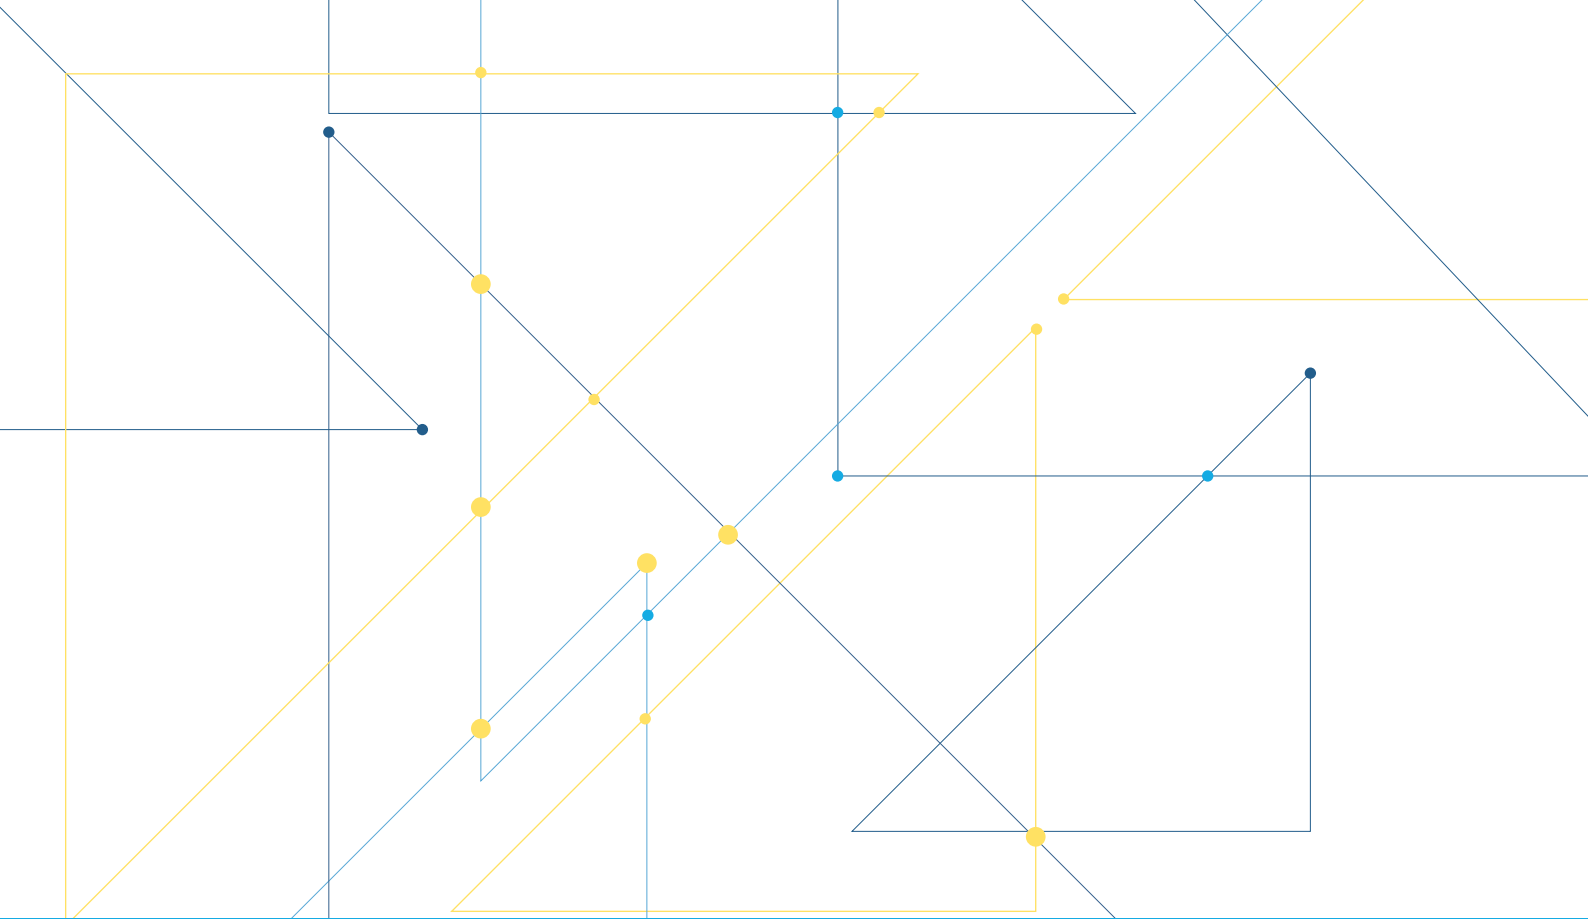

NSELED Europe srl  
Via Marco d'Agate, 41/B  
20139 Milano Italia  
info@nseled.eu  
T. +39 02 50042152



For more information  
[www.nseled.eu](http://www.nseled.eu)

