


Rental Flexible LED Display



Rental Flexible LED display module

Unveiling our latest **innovation**: the Rental Flexible LED Display. Seamlessly combining the swift setup of a rental module with the **versatility** of flexible displays, it's a game-changer. Easy assembly, diverse installations, and **dynamic shapes**: your events just found a new dimension!

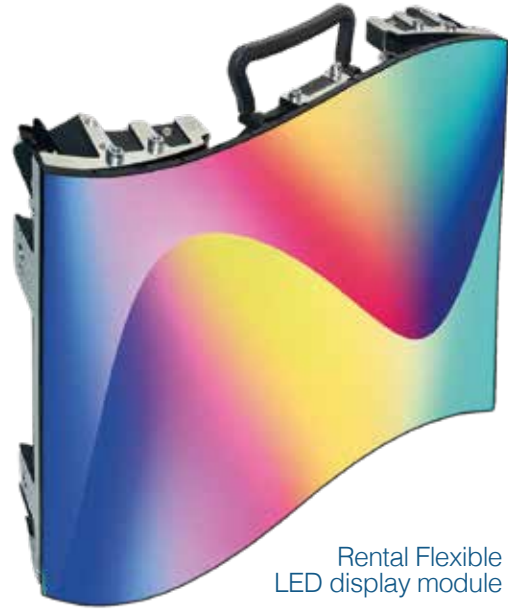

Rental LED Advantage

The **RF series** of LED displays has a **modular design** that allows it to be easily connected and configured into a **variety of sizes and shapes**. The following shapes are commonly used: curved, cylindrical, spherical, convex and concave, customized.

The RF Series LED displays provide an **immersive experience** and offers a **distinctive visual experience** for viewers because of the following features: surround design, wide visual effects, high brightness and contrast, dynamic content capabilities, interactive effects.

The immersive experience provided by flexible large-scale rental LED displays creates visually **captivating and memorable environments** for events, concerts, exhibitions, trade shows and other large-scale facilities.



Rental Flexible LED display module configuration examples

Parameters

Rental Specification

Model Type	RNI265050-F	RNI395050-F
Pixel pitch	2.6 mm	3.91 mm
Destiny	147.456 dots/m2	65.536 dots/m2
LED Type	SMD1515	SMD2121
Pixel Type (R/G/B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module Size	250*250 mm	250*250 mm
Module Resolution	96*96 Pixels	64*64 Pixels
Cabinet Size (H*W)	500*500 mm	500*500 mm
Cabinet Resolution (PX* PX)	192*192 Pixels	128*128 Pixels
Drive Mode	1/16 Scan	1/16 Scan
Weight	7,5 Kg	7,5 Kg
Optimal Viewing Distance	> 2,61 mt	> 3,91 mt
Brightness	1000 nits	1000 nits
IP Rating	IP43	IP43
Maximum Power Consumption	660W	600W
Average Power Consumption	210W	180W
Application	Indoor	Indoor
Case Material	Die-casting aluminum	
Viewing Angle	140° (H) / 140° (V)	
Input Voltage	110 - 220 V	
Gray Scale (bit)	16 bit	
Refresh Rate (HZ)	3840 HZ	
Control Method:	Sync & Async	
Temperature Operating (°C)	-20 +80	
Working Humidity	10% RH - 90%RH	
Services Access	Rear	
Certificate	CE/ROHS/FCC	

Application Scenarios

Concerts and live events
Corporate and Conference
Exhibitions Stage Background
Advertising and Retail
Sport Arenas | Transportations
Museums and Galleries
Entertainment | Casinos



LED display solutions
for business and retail
 SIMPLE • INNOVATIVE • CUSTOMIZABLE


 Ready to disPLAY

via Marco d'Agate, 41 | 20139 Milano | Italia | info@nseled.eu | +39 02 50042152

www.nseled.eu