




# SPORTS RENTAL LED DISPLAY

*The leading perimeter & rental system*

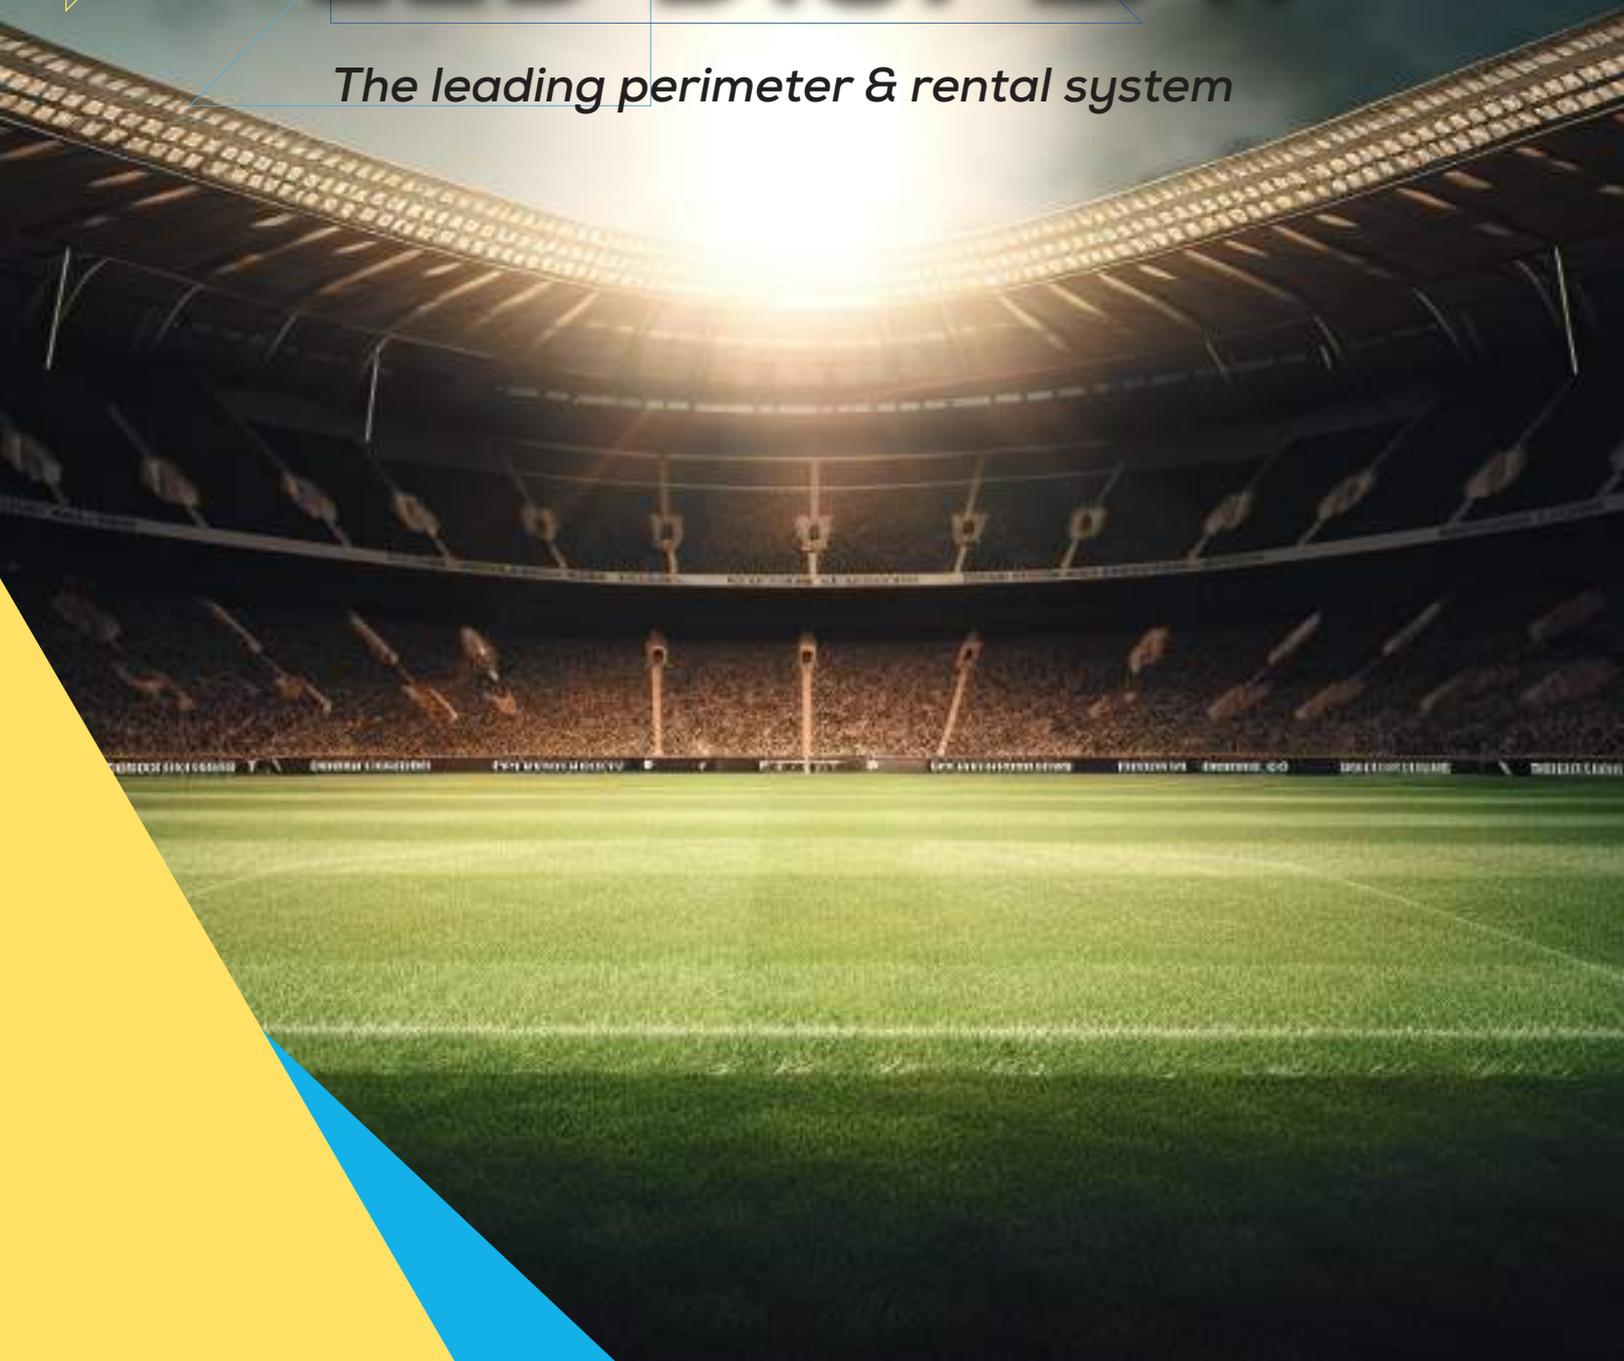

High Refresh Rate & Wide Viewing Angle

Player Protective Design

Emergency Access Design

EMC

Fast Installation



Standard Size

1600 \* 900mm

**Light weight**

Weight: 45KG/m<sup>2</sup>  
Thickness: 101mm



Product Size

1600 mm

101 mm



IP66 Front & Rear



5VB Rreproof



EMC



Front & Rear Services



High Brightness

## Stadium screen carts are convenient



Two carts  
can be stacked



Load 4 panels



## Specifications

ModelName	FAB-P6.6	FAB-P8.3	FAB-P10
PixelPitch(mm)	6.67	8.33	10
PixelDensity(dot/㎡)	22500	14400	10000
LEDsealingType	SMD2727	SMD3535	SMD3535
ModuleSize(mm*mm)	400*300	400*300	400*300
ModuleResolution(PX*PX)	60*45	48*36	40*30
ModuleWeight(kg)	1.5(kg)	1.5(kg)	1.5(kg)
ModuleThicknees	18.5mm	19mm	20mm
DriveMode	ConstantCurrent	ConstantCurrent	ConstantCurrent
HorizontalViewingAngle(Deg)	170	170	170
VerticalViewingAngle(Deg)	110	110	110
Brightness(cd/㎡)	6500-9500	6500-10000	6500-10000
GreyScale (bit)	14bit	14bit	14bit
RefreshRate(Hz)	3840	3840	3840
MaximumCabinetPowerConsumption(W)	630W/㎡	550W/㎡	550W/㎡
AverageCabinetPowerConsumption(W)	250/㎡	200/㎡	200/㎡
CabinetSize(mm*mm)	1600*900mm	1600*900mm	1600*900mm
CabinetWeight(Kg)	45KG/㎡	45KG/㎡	45KG/㎡
CabinetThickness(mm)	101	101	101
InputVoltage(V)	AC90-260V	AC90-260V	AC90-260V
WorkingTemperature(°C)	-20°C-60°C	-20°C-60°C	-20°C-60°C
Operatinghumidity (RH)	10%-90%	10%-90%	10%-90%
WaterproofLevelFront&Rear	IP68/IP66	IP68/IP66	IP68/IP66
WorkingEnvironment	outdoor	outdoor	outdoor
InstallationMethod	Fullfront&rearservice	Fullfront&rearservice	Fullfront&rearservice
Certificate	CE (LVD、EMC) ,ETL,CB	CE (LVD、EMC) ,ETL,CB	CE (LVD、EMC) ,ETL,CB

Digital signs offer unparalleled flexibility. It's possible to update content in real-time, adapting it to various promotions, events, or seasons.

## CONNECTIVITY

It is possible to upload content in the following ways:

**LAN** • Through a dedicated Ethernet port.

**WI-FI** • Via AP or corporate Wi-Fi.

**USB** • Using a Pen Drive.

**HDMI** • For real-time content.

**AUDIO** • Connect the kiosk to audio speakers using a 3.5mm jack.

**CLOUD** • Request a CLOUD account to upload content remotely.

We offer a cloud storage service with servers located in Europe, a valuable choice for security, privacy, performance, and regulatory compliance.

You will be able to manage one or more units simultaneously.

**NSELED** is a leading manufacturer that provides one-stop LED display solutions and services. We provide installation assistance, after-sales support, and a 2 years warranty to assure that we meet your needs.

## SERVICES

- Technical assistance
- One-time training
- Content management software
- App Android e IOS

NSELED Europe srl  
Via Marco d'Agate, 41/B  
20139 Milano Italia  
info@nseled.eu  
T. 02 40707210



For more information  
[www.nseled.eu](http://www.nseled.eu)

